

A COMPLETE LINE of braided sleeveings designed to offer maximum protection, design flexibility and return-on-investment for all your sleeving applications.


FLEXIBILITY

FLEXO expandable monofilament sleeveings are designed for bundling and protecting hoses, cables and wire harnesses from abrasion and damage in both routine and extreme conditions.


Flexo's unique mesh construction allows easy installation over new or existing cables or harnesses without adding to the bulk or weight of the bundle.

Various sizes are available to fit any diameter bundle up to 4 inches.

All are lightweight, reusable and add to the longevity of the wires, wire harness or cables.



G

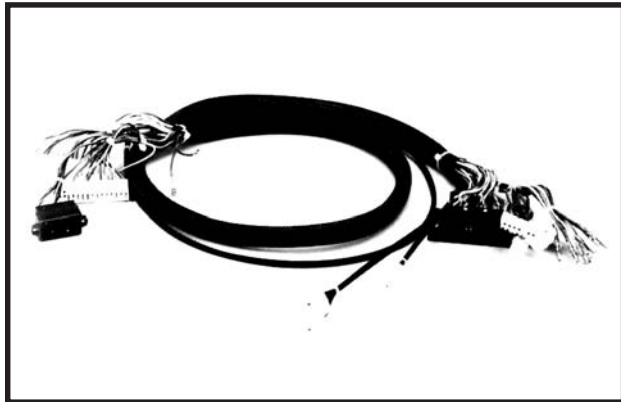

Grade PET Standard

Braided from .010" polyester monofilament yarns with a continuous operating temperature of 125°C. Commonly used in electronics and industrial applications where economy and durability are involved.

SPAENAUR No.	Dimensions in Inches			Weight Lbs./ 100 Ft.	U.P.Q. Feet/ Spool
	Nom. Dia.	Min. Dia.	Max. Dia.		
810-011	1/8	3/32	1/4	.16	1,000
810-012	1/4	1/8	7/16	.24	1,000
810-013	1/2	1/4	3/4	.77	500
810-014	3/4	1/2	1-1/4	1.20	250
810-015	1-1/4	3/4	1-3/4	1.60	250
810-030	1-1/2	1	2-1/2	1.96	200
810-016	1-3/4	1-1/4	2-3/4	2.70	200
810-017	2	1-1/2	3-1/2	3.30	200
810-018	2-1/2	1-3/4	4-1/2	3.80	200

Colour: Black

Grade FR Flame Retardant

Braided from .010" flame retardant polyester yarn. Continuous operating temperature of 125°C. Commonly used in electronic and industrial applications where flammability and durability are involved.

SPAENAUR No.	Dimensions in Inches			Weight Lbs./ 100 Ft.	U.P.Q. Feet/ Spool
	Nom. Dia.	Min. Dia.	Max. Dia.		
810-036	1/8	3/32	1/4	.16	1,000
810-037	1/4	1/8	7/16	.24	1,000
810-038	1/2	1/4	3/4	.77	500
810-039	3/4	1/2	1-1/4	1.20	250
810-040	1-1/4	3/4	1-3/4	1.60	250
810-041	1-3/4	1-1/4	2-3/4	2.70	200
810-042	2	1-1/2	3-1/2	3.30	200
810-043	2-1/2	1-3/4	4-1/2	3.80	200

Colour: Black/White tracer

Melt Temp: 250°C

CATALOG 13