

G


Post Top Battery Terminals

Copper construction provides a low resistance connection while tin plating offers extended life in non-gaseous environments. Cable size, polarity, and tool die codes are in raised characters for increased legibility.



Tin Plate Straights

SPAENAUR No.	Cable Size	Polarity	Tool Die Codes	Unit Pkg.
622-200	4	NEGATIVE	GREEN J-H	1
622-201	4	POSITIVE	GREEN J-H	1
622-203	4	UNIVERSAL	GREEN J-H	1
622-204	1-2	NEGATIVE	PINK H-H	1
622-205	1-2	POSITIVE	PINK H-H	1
622-206	1/0	NEGATIVE	BLACK E-A	1
622-207	1/0	POSITIVE	BLACK E-A	1
622-208	2/0	NEGATIVE	ORANGE A-C	1
622-209	2/0	POSITIVE	ORANGE A-C	1
622-210	3/0	NEGATIVE	PURPLE A-B	1
622-211	3/0	POSITIVE	PURPLE A-B	1
622-212	4/0	NEGATIVE	YELLOW A-A	1
622-213	4/0	POSITIVE	YELLOW A-A	1

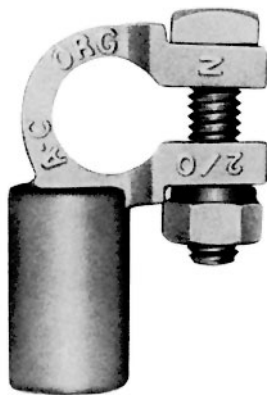

Tin Plated Right Elbows

SPAENAUR No.	Cable Size	Polarity	Tool Die Codes	Unit Pkg.
622-214	1/0	NEGATIVE	BLACK E-A	1
622-215	1/0	POSITIVE	BLACK E-A	1
622-216	2/0	NEGATIVE	ORANGE A-C	1
622-217	2/0	POSITIVE	ORANGE A-C	1
622-218	3/0	NEGATIVE	PURPLE A-B	1
622-219	3/0	POSITIVE	PURPLE A-B	1
622-220	4/0	NEGATIVE	YELLOW A-A	1
622-221	4/0	POSITIVE	YELLOW A-A	1



Tin Plated Left Elbows

SPAENAUR No.	Cable Size	Polarity	Tool Die Codes	Unit Pkg.
622-222	1/0	NEGATIVE	BLACK E-A	1
622-223	1/0	POSITIVE	BLACK E-A	1
622-224	2/0	NEGATIVE	ORANGE A-C	1
622-225	2/0	POSITIVE	ORANGE A-C	1
622-226	3/0	NEGATIVE	PURPLE A-B	1
622-227	3/0	POSITIVE	PURPLE A-B	1
622-228	4/0	NEGATIVE	YELLOW A-A	1
622-229	4/0	POSITIVE	YELLOW A-A	1