


### All-Rubber SealStrip®

**Special Strength** - Tough cotton fibres make SealStrip® amazingly strong, but it trims easily without special tools. **Uniform Tackiness** - Clings to glass during application, holds tight when glass is set. Yet it peels off the roll easily, without tearing.

**No Oil required** - Applies easily, without oil. For special applications, SealStrip will absorb oil and swell sufficiently to ensure extra-strong grip. **Resists Age** - Thousands of applications prove that SealStrip® holds its physical characteristics, including tackiness throughout its life.

Even moisture cannot affect the setting. **Won't Discolour Glass** - Laminated safety glass is safe from discolouration, because the specially compounded rubber used in SealStrip® will not bleed.



SPAENAUR No.	THICKNESS	WIDTH	Feet Per Roll
B-168	1/32"	1-1/2"	100
B-169	3/64"	1-1/2"	100
B-167	1/16"	1-1/2"	75
GP-11	3/32"	1-1/2"	50

### GLASS-PAK

Absolutely waterproof. Easily compressed. Swells after setting. Trims easily, with a neat black edge. No threads to fray out.

SPAENAUR No.	THICKNESS	WIDTH	*Feet Per Roll
C-97	1/32"	1-3/8"	480
GP-5	3/64"	2-1/4"	345
B-787	1/16"	2"	250
C-20	1/16"	2-1/2"	260
C-18	3/32"	1-1/2"	170
GP-12	3/32"	2-1/2"	165

\*Jumbo Rolls - Not Boxed.

#### IMPORTANT!

When setting "Safety-Glass", brush inside of steel channel with light motor oil, place **GLASSPAK** over glass-edge and insert in channel. Oil will cause **GLASSPAK** to swell when set, forming a perfect, watertite seal.

P.C.834


### CORK AND RUBBER STRIPPING

Used for setting automobile door and windshield glass. Made of highest quality pure ground cork set in active rubber, coated on strong fabric backing. Absolutely waterproof. All rolls full gauge, full width and full length.

**UNIT PACKAGE ONE 100' Roll**

SPAENAUR No.	Width	Thickness
6002-S	1-1/2"	1/32"
6007-S	1-1/2"	1/16"

P.C.834

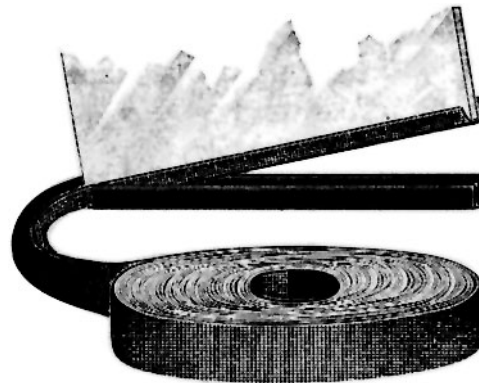


### Black PVC ELECTRICAL TAPE

SPAENAUR No.	Tape Thickness	Size of Roll
TS-302	7.0 mil	3/4" x 66'
892-007	8.0 mil	3/4" x 66'

Adhesive backed. Replaces rubber and friction tape. Resists water, oil, acids and corrosive chemicals. Strong. For neat, lasting splices.

Priced Singly



CSA Approved

### DUCT TAPE - General Purpose



Dull Silver Colour

SPAENAUR No.	Width	Roll Length
892-006	1-7/8" (48mm)	180' (55 metres)

#### Applications:

Excellent for all duct sealing applications. Attaching insulation to duct work and pipes. Used for patching fiberglass and metal. Used for holding down wiring in trade show and television industry.

#### Benefits:

Good flat surface for excellent tack. Conformable. Very good adhesion. Temp. resistance to 122°F (50°C).

UNIT PKG. 1 ROLL