



Folding L-Handle Assembly



A sturdy handle assembly which incorporates a recessed centre pan in combination with a folding L-handle and a 5/16" square shank. The L-handle may be folded flat into the recessed pan to provide the lowest possible projection. The shank may be inserted into any multi-point centre mechanism which accepts such a shank.

Rubber pad in pan reduces vibration noise with handle folded.

099-057

Mfr. #15-5560


ZINC PLATED

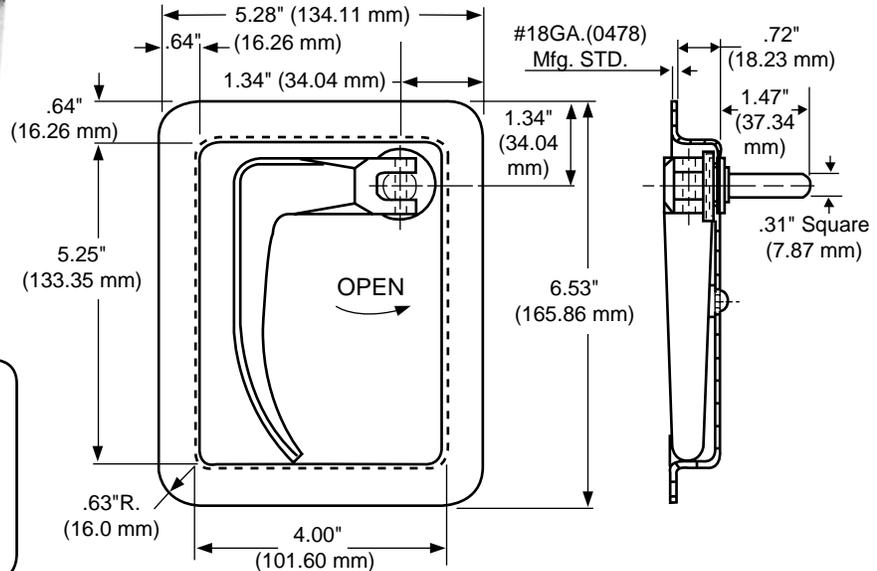

***SLIDING DOOR LOCK**

*WARNING: This Sliding Door Lock should NOT be used for personal restraint applications.

(Hold Door in Open or Closed Position)



D-3178 (Mfr. #5696)

Plain Finish

- 4-1/8" length of lock
- 2" width of lock
- 5/8" thickness of case
- 5/16" sq. hole for handle shank
- .69 lbs. weight each

D-3211 (Mfr. #5696 1/2)

With thumb latch to lock door from inside.

Weight: .74 lbs. each



D-3180


(Mfr. #10-5690X)

Zinc Plated

Weight:
3 lbs. each

Dimensions:

- 5-5/16" length of case
- 2-1/2" width of case
- 2-3/4" end of hook bolt to c. of lock case
- 3/4" thickness of lock case
- 5/16" sq. hole for handle shank
- 4-3/4" mounting hole centre dim. - length
- 2" mounting hole centre dim. - width
- 17/64" mounting hole dia. - 4 holes

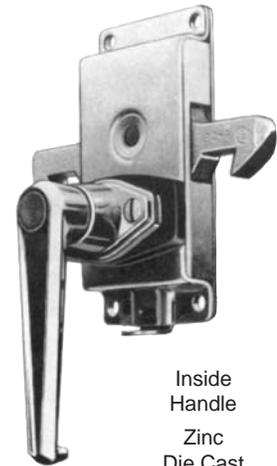

Inside Handle
Zinc Die Cast
Chrome Plated

This heavy duty sliding door lock has a firm spring action which latches the door securely, requires but a slight turn of the handle to release it and open the door. This ease of operation is due to the independent latches hinged from a shoulder pin in centre of lock case. The double latches permit the lock to be used for right or left hand doors as well as for the two-fold purpose of holding door in both open and closed positions. This mechanism permits locking the doors from the inside by merely pushing in the locking thumb latch. **However, this does not automatically unlock by turning the inside handle. To unlock, the thumb latch must be released manually.**

MAY BE USED IN PASSENGER RESTRAINT APPLICATIONS.

CATALOG 13