


**Flush Mounted • Paddle Handle**

**099-017**

Zinc Plated Steel

Mfr. #4890

*Non-Locking*

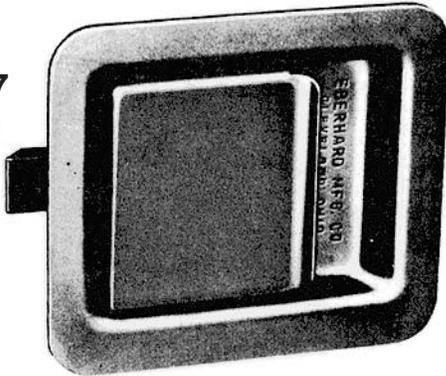

- 099-136** Same as 099-017, except has long angle slam bolt. Zinc Plated Steel. (Mfr. #6-4890 (25))
- 099-189** Same as 099-017, except with inside release handle. Zinc Pltd. (Mfr. #3-4890) 4-3/4" L. x 3-3/4" W.
- 099-014** Same as 099-017, except made of 300 Series Non-Corrosive Stainless Steel. (Mfr. #4890SS)
- 099-015** Same as 099-017, except flange has four 11/64" mounting holes with 3 x 3-3/16" hole centres. Made of 300 Series Non-Corrosive Stainless Steel. (Mfr. #2-4890SS (10))

A slam-action lock for single point engagement. Easily operated by pulling paddle handle outward.

Easy to install. Simply cut hole close to edge of door and attach by screws, rivets, or welding. Can be used on either right or left hand doors.

*(Some outside case dimensions may be 4-1/2" x 3-1/2", but, cut-out size stays the same.)*

**Dimensions:**

- 4-3/4" case outside length                      3/4" width slide bolt
- 3-3/4" case outside width                      7/16" projected thickness of slide bolt
- 1-1/4" overall depth
- 13/16" bottom of flange slide bolt          7/16" slide bolt travel
- 1" slide bolt projection                          Weight: 13 oz. each from slide bolt case

See cut-out diagram at bottom of page.

**099-012** Same as 099-255, except made of 300 Series St. Steel & four 11/64" mounting holes (Mfr. #4891SS) Outside case dimensions are 4-3/4" x 3-3/4".

**099-013** Same as 099-255 (at right), except with inside knob release. Zinc Plated. (Mfr. #1-4891)



**099-255**

Zinc Plated  
Mfr. #4891

*Key Locking* (Keyed to differ)

099-255 is the same as 099-017 lock (upper left), but with a key-locking mechanism. Replacement key cylinder **099-040**. (Mfr. #4901-61) One key furnished.                      Weight: 1 lb., 2 oz. each

NOTE  
Drawings and dimensions on this page are for reference only. For manufacturing, production, or tooling purposes, obtain current engineering print from SPAENAUER.

**Flush Mounted • Paddle Handle**

A slam-action latch for single point engagement. Easily operated by pulling paddle handle outward.

Can be installed in the same cut-out as the latches shown above, but has a wider flange with a smaller corner radius. In addition, the paddle handle and trigger for the bolt are an integral unit. Another important feature is the fact that the key cylinder on 099-148 is placed in the recessed pan rather than the handle. This provides additional protection to the key cylinder while minimizing maintenance.

**099-147**

(Mfr. #4820)

*Non Key-Locking*



**Material: STEEL**  
Electro Zinc Finish

**099-148**

Mfr. #4821


*Key Locking*

**All latches this page use this cut-out.**

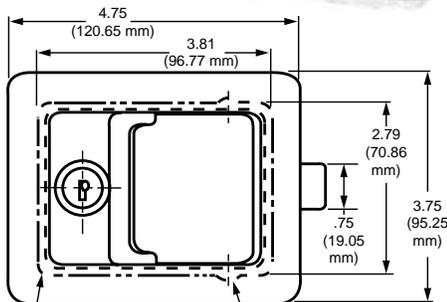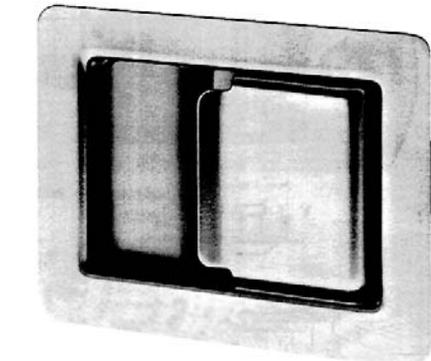

Suggested Outline of Cutout

Notch if Needed for Cross Pin Clearance.

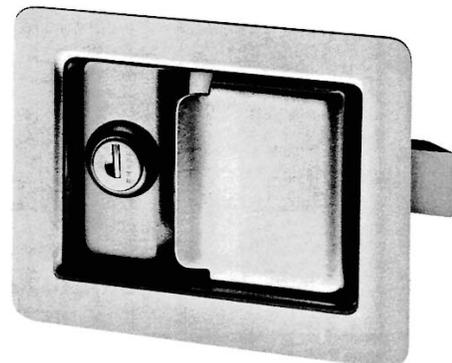

CATALOG 13