

### SHOCKCORD MOUNTS

**Tough Delrin 500 (Black)**  
For use with 1/4" dia. Shockcord

SPAENAUR No.	Style	Type of End	Unit Pkg.
122-410	A	For 1" Webbing	10
122-413	B	Has 3/16" hole	10
122-416	C	Hook, with tongue	10

### EASY HOOK

(Natural Nylon)

**SPAENAUR No. 122-420**

Hook Opening .153"



Non-conductive, rust resistant, and can be used with "D" and "O" rings.  
For use with 1/8" dia. Shockcord.

UNIT PACKAGE 50

All mounts come in two separate parts which are snapped together after insertion of the cord.


Note: Elastic Cord should be tight-wrapped with 1" wide masking tape, 1-1/4 turns. Then cut through the wrapped part with a sharp knife or shears. This yields non-fraying ends, for secure anchoring in the mount.

**SPAENAUR No. 122-688**  
**Adjustable SHOCKCORD HOOK**  
For use with 1/4" dia. Shockcord  
Material: Acetal Colour: Black  
UNIT PACKAGE 10

**Adjustable CORD HOOK**  
**SPAENAUR No. 122-445**  
For use with 1/8" to 1/4" dia. Shockcord.  
Snaphook opening to 1/4" dia. max.  
Material: Nylon Colour: Black  
UNIT PACKAGE 10

### ELASTIC SHOCKCORD

Strong and durable.



### CHOOSE FROM COTTON OR NYLON COVERING.

SPAENAUR No.	COTTON COVERING	
	Cord Dia.	Spool Size
810-009	1/8"	1,000 ft.
MP-82	3/16"	1,000 ft.
MP-44	1/4"	500 ft.
MP-45	5/16"	500 ft.
MP-46	3/8"	300 ft.
MP-47	7/16"	250 ft.
MP-48	1/2"	150 ft.

SPAENAUR No.	NYLON COVERING	
	Cord Dia.	Spool Size
810-051	1/8"	1,000 ft.
810-052	5/32"	1,000 ft.
810-053	3/16"	1,000 ft.
810-054	1/4"	500 ft.
810-055	5/16"	500 ft.
*810-010	5/16"	500 ft.
810-056	3/8"	300 ft.
810-057	7/16"	150 ft.
810-058	1/2"	150 ft.

#### ELASTIC CORD LOAD AND STRETCH DATA


Dia.	Stretch	Load 100%	Approx. Breaking Strength
3/16"		12 lbs.	75 lbs.
1/4"	6" to 12"	20 lbs.	127 lbs.
5/16"	6" to 12"	55 lbs.	175 lbs.
3/8"	6" to 12"	60 lbs.	520 lbs.
7/16"	6" to 12"	65 lbs.	575 lbs.
1/2"	6" to 12"	70 lbs.	610 lbs.

\*All Black Cover

- Covering Colour -  
**White with Coloured Fleck.**

### SHOCKCORD ATTACHMENTS

Available in Plated Steel  
and  
302 Stainless Steel

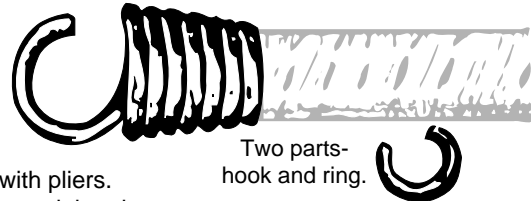

Two parts-hook and ring.

Unit Package 25 - One number.

Hook is first slid over end of cord. Ring is then clamped to end of cord with pliers. Hook then engages ring, and will not come off. Hook completely covers retaining ring.

#### High Tensile STEEL - Zinc Plated

Complete Attachment	Spring Hook Only	Retainer Ring Only
MH-90 (for 3/16" shockcord)	121-213	121-218
MH-1 (for 1/4" shockcord)	121-214	121-219
MH-2 (for 5/16" shockcord)	121-215	121-220
MH-91 (for 3/8" shockcord)	121-216	121-221
MH-3 (for 7/16" and 1/2" cord)	121-217	121-222

#### 302 STAINLESS STEEL

Complete Attachment	Spring Hook Only	Retainer Ring Only
MH-90SS (for 3/16" shockcord)	121-823	121-828
MH-1SS (for 1/4" shockcord)	121-824	121-829
MH-2SS (for 5/16" shockcord)	121-825	121-830
MH-91SS (for 3/8" shockcord)	121-826	121-831
MH-3SS (for 7/16" and 1/2" cord)	121-827	121-832

CATALOG 13