


STANDARD SERIES



STEEL
Zinc Plated

316
Stainless Steel

(Stainless 18/12 Mo.)

NYLON 6/6
Natural colour

(▲ Red colour)

APPROXIMATE WIRE DIAMETER "D" CONVERSION	
Inch	mm
7/64" =	3.0 mm
1/8" =	3.5 mm
5/32" =	4.0 mm
3/16" =	5.0 mm
1/4" =	6.0 mm
9/32" =	7.0 mm
5/16" =	8.0 mm
3/8" =	9.0 mm
7/16" =	10.0 mm
1/2" =	12.0 mm
9/16" =	14.0 mm
5/8" =	16.0 mm
11/16" =	18.0 mm
25/32" =	20.0 mm

SPAENAUR No.	All dimensions stated in millimetres				Safe Working *Load	Unit Pkg. Qty.
	A	B	C	D		
121-027	8.5	25.0	4.0	3.0	50 kg	25
121-019	10.0	29.0	5.0	3.5	100 kg	25
121-333	11.5	31.5	5.5	4.0	180 kg	25
121-334	13.0	39.5	6.5	5.0	280 kg	25
121-335	14.5	45.0	7.5	6.0	400 kg	25
121-336	16.0	52.0	8.5	7.0	550 kg	10
121-337	17.5	58.0	10.0	8.0	700 kg	10
121-028	19.0	62.0	11.0	9.0	900 kg	10
121-338	20.5	69.0	12.0	10.0	1,100 kg	10
121-339	23.5	80.5	15.0	12.0	1,500 kg	5
121-340	26.5	93.0	17.0	14.0	2,200 kg	5
121-341	29.5	108.0	19.0	16.0	2,900 kg	5
121-029	32.5	121.0	23.0	18.0	3,500 kg	5
121-030	35.5	137.5	26.0	20.0	4,000 kg	1


316 STAINLESS STEEL	All dimensions stated in millimetres				Safe Working *Load	Unit Pkg. Qty.
	A	B	C	D		
121-810	8.5	25.0	4.0	3.0	160 kg	25
121-811	10.0	29.0	5.0	3.5	220 kg	25
121-812	11.5	31.5	5.5	4.0	280 kg	25
121-813	13.0	39.5	6.5	5.0	450 kg	10
121-814	14.5	45.0	7.5	6.0	650 kg	10
121-815	16.0	52.0	8.5	7.0	900 kg	10
121-816	17.5	58.0	10.0	8.0	1,100 kg	10
121-817	19.0	62.0	11.0	9.0	1,400 kg	5
121-818	20.5	69.0	12.0	10.0	1,800 kg	5
121-819	23.5	80.5	15.0	12.0	2,500 kg	1
121-820	26.5	93.0	17.0	14.0	3,500 kg	1
121-821	29.5	108.0	19.0	16.0	4,500 kg	1
121-822	32.5	121.0	23.0	18.0	5,400 kg	1

NYLON	All dimensions stated in millimetres				Safe Working *Load	Unit Pkg. Qty.
	A	B	C	D		
122-001	12	47	8	6	20 kg	25
122-002	16	58	10	8	25 kg	10
122-003	20	69	12	10	30 kg	10
▲122-051	20	69	12	10	30 kg	10

Standard, Pear, Square and Delta Series are stocked.
Large Mouth and Eye Series are available but not stocked.
Price and delivery P.O.R.

WARNING:

- Strain to be exercised in Arrow Directions only.
- Do not exceed safe working load.
- Not to be used for overhead lifting.
- To secure, the nut must be closed so that no threads are exposed. Failure to do so will cause the link to fail below its rated capacity.

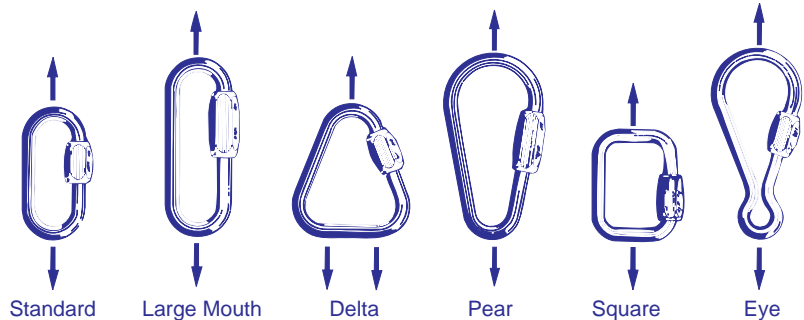

***BREAKING LOAD IS APPROXIMATELY 5 TIMES THE SAFE WORKING LOAD .**

CATALOG 13