

Inch

## Anti-Vibration Isolation Pads

Pouce

Tampons amortisseurs de vibration


**TYPICAL USES:**  
 Refrigeration  
 Air Conditioners  
 Presses  
 Generators  
 Pumps  
 Business Machines  
 Compressors  
 Fans  
 Motors

### PROLONGS MACHINE LIFE / DAMPENS VIBRATION REDUCES MAINTENANCE COST

SPAENAUR Anti-Vibration Pads are available in a neoprene ribbed pad with a 1/2" cork centre. These pads are made from a high quality neoprene elastomer, compounded with excellent resistance to aging, compression set, water and oil.

Additional vibration isolation is obtained with both high and low weight loads by alternate rib height construction. Recommended maximum loading capacity of 50 PSI.

50 Durometer

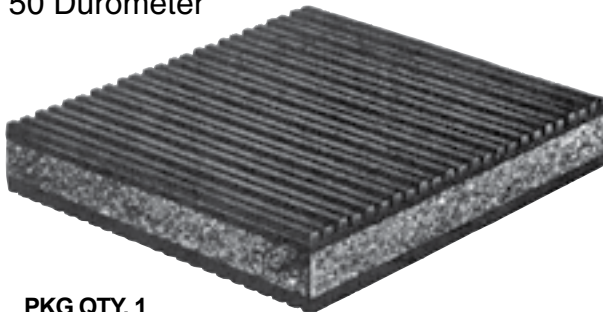

PKG QTY. 1


### CORK & NEOPRENE PAD

| SPAENAUR No. | Dimensions    |         | Weight                      |
|--------------|---------------|---------|-----------------------------|
|              | Lgth. x Wdth. | Thick.  |                             |
| AVP-2        | 18" x 18"     | 7/8"-1" | <b>3.06 kg</b> (6-3/4 lbs.) |
| AVP-3        | 6" x 6"       | 7/8"-1" | <b>.255 kg</b> (9 oz.)      |
| AVP-4        | 4" x 4"       | 7/8"-1" | <b>.113 kg</b> (4 oz.)      |
| AVP-5        | 3" x 3"       | 7/8"-1" | <b>.056 kg</b> (2 oz.)      |

### INSTALLATION DATA

SPAENAUR Anti-vibration Pads should be measured and cut so that there is not more than 50 pounds per square inch of machine weight on it when installed. Since most machinery is designed with approximately 50 pounds PSI maximum base loading, cutting a pad the size of each foot on the machine allowing for 1/2" overlap all around, will generally insure proper loading.

'Waffle'  
 Pattern

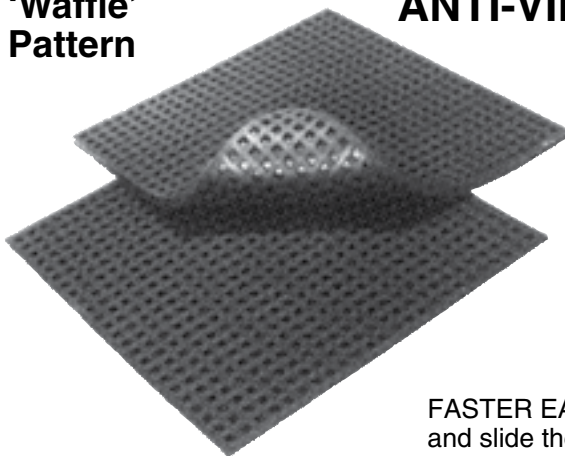

### ANTI-VIBRATION NEOPRENE PADS

| SPAENAUR No. | DIMENSIONS        | Max. Load | DURO-METER | Weight     |      |
|--------------|-------------------|-----------|------------|------------|------|
|              |                   |           |            | kg.        | lbs. |
| *899-050     | 18" x 18" x 5/16" | 50 PSI    | 50         | <b>2.0</b> | 4.3  |
| *899-100     | 18" x 18" x 5/16" | 100 PSI   | 75         | <b>2.0</b> | 4.3  |
| ▲ 899-200    | 18" x 18" x 1/2"  | 200 PSI   | 65         | <b>2.5</b> | 5.5  |
| ▲ 899-300    | 18" x 18" x 1/2"  | 300 PSI   | 80         | <b>2.5</b> | 5.5  |

\*Plain (no pattern) on one side.  
 ▲Waffle pattern on both sides

PKG QTY. 1

**FASTER EASIER INSTALLATION.** Simply lift the machine to be mounted and slide the pads under each leg. The waffle moulded design allows material expansion and highest deflection without loss of stability, maximum resilience and minimum of creep, providing firm footing to both floor and equipment.

*Note: When installing allow 1/2" margin all around feet of machine.*

**NEOPRENE –  
 for maximum life  
 and oil resistance**