


Inch

Cam / Strap Buckles

Pouce

Came / Boucles pour sangle

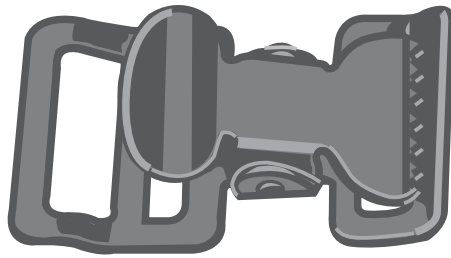

WEB STRAP BUCKLE

Overall Length
2-7/16"

Will Fit Webbing
1" wide x 3/32",
1/8", or 3/16" thick.

121-190 **PKG QTY. 25**
Steel, Nickel Plated

SPAENAUR No.
122-442

BUCKLE

White Colour:
of tough "Delrin 500"
For Straps — 1" Wide x 3/64", 1/16" or 1/8" thick.




The easy adjusting buckle is impervious to weathering, foolproof to operate and excellent in applications where instant adjustability is required. Release is accomplished quickly and easily with the press of a thumb.

End uses: Marine use, Camping, Backpacks, General outdoor use. Juvenile care products.

Coastguard and Underwriters Laboratories Approved.
PKG QTY. 25

WEBBING BUCKLES
Stamped Steel — Nickel Plated



PKG QTY. 144

SPAENAUR No.	For Webbing Width
B-1582	1/2"
B-1583	5/8"
123-B01-1Y	3/4"
B-1585	7/8"
B-1586	1-1/4"

SPAENAUR No.
122-441

STRAP BUCKLE
of tough **NATURAL NYLON**



Originally developed for battery tie-down assemblies in marine applications to resist corrosives such as battery acid and salt spray. The strap buckle is a worker, having an aggressive tooth pattern for extra holding power.

For Webbings up to
1-7/16" wide x 1/8" thick.

PKG QTY. 25

End Uses
Marine Use,
Backpacking,
Hold-down,
Camping.

SUPERTUFF
Black Nylon

CAM BUCKLE

Takes 2" x 1/16" or 1/8" Webbing

SPAENAUR No. **122-443**



PKG QTY. 25

End Uses: Scuba diving, Medical restraint, Recreational, Tie-downs, Belts.


See pages M18-M23 for more Webbing Hardware

See Page M47 for Loops and Slides

TUCK LOOP



STEEL WIRE LOOP



SLIDES



FOOTMAN LOOPS




Cam (Strap) Buckles

Metric

Boucles (pour sangle) à came

Métrique

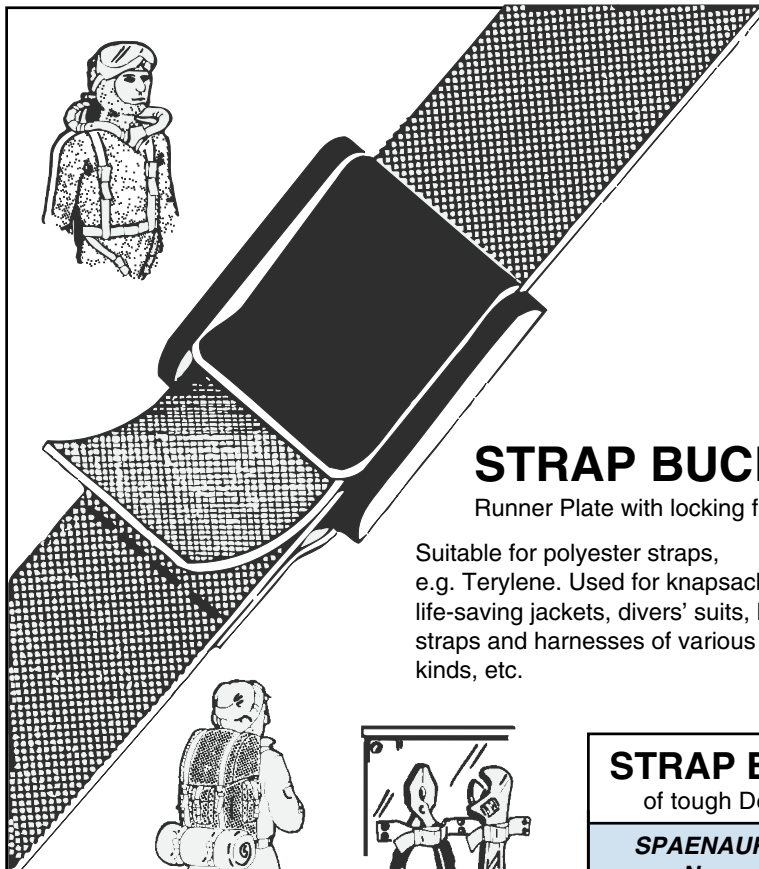







STRAP BUCKLE

Runner Plate with locking flap.

Suitable for polyester straps, e.g. Terylene. Used for knapsacks, life-saving jackets, divers' suits, luggage straps and harnesses of various kinds, etc.

122-650/651

The buckle is attached to the strap by sewing, rivets or high-frequency welding.

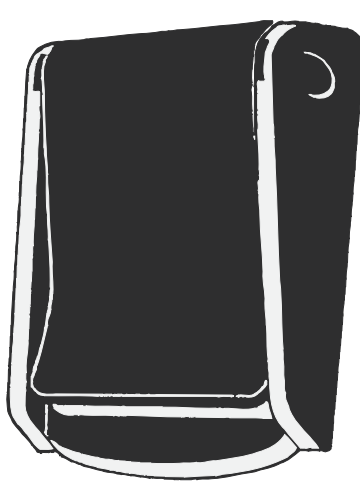







STRAP BUCKLE		For straps of 1.4 to 1.5 mm thick.	
SPAENAUR No.	Colour	Strap Width mm	PKG QTY.
122-630	Black	25	10
122-631	White	25	10
122-650	Black	40	10
122-651	White	40	10
122-681	Black	50	10

See also "Extra Strong", on Next Page.

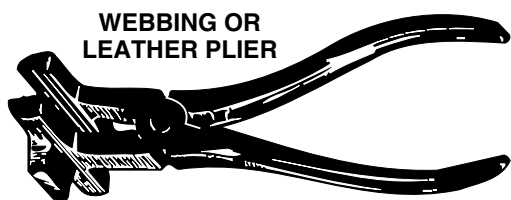Parts illustrated are to approximate actual size.

See Page M39 for Webbing



NYLON & POLYESTER WEBBING



Metric


Center-Release Buckles / Cord Locks & Cord Ends

Métrique

Boucles à dégagement central / Autobloqueurs et embouts de cordon

EXTRA STRONG CLIP BUCKLE

(Clip and Hold)

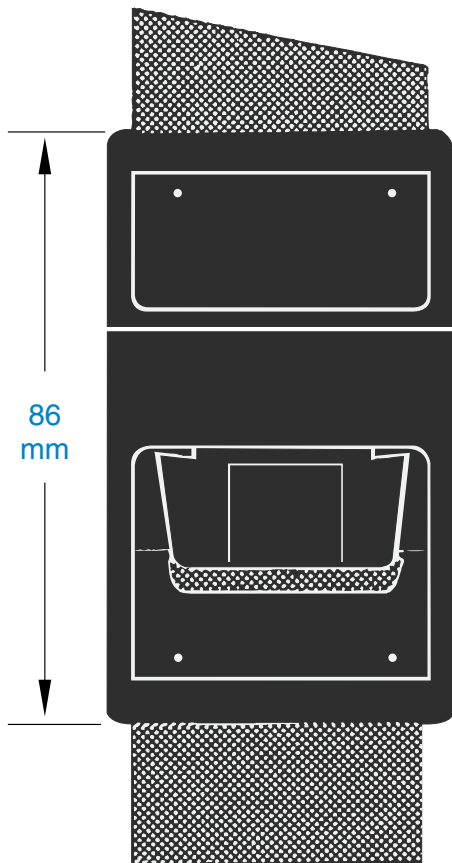

122-A01-1M



- Suitable for webbings of Terylene, Nylon, etc.
- Special protection against accidental opening.
- Used on Life-Saving Jackets, heavy Rucksacks, etc.

122-A01-1M. Suitable for **40 mm** strap of **1.4 - 1.5 mm** thickness.

The surface of the strap should not be too smooth.



Mounting without sewing or rivets. Insert the strap in the clip and holder to the desired length. The Clip Buckle remains in position whether the strap is in use or not, but is nevertheless adjustable. Adjust the position by pushing the outer part of the strap inwards in order to release the strap. The loose end is hidden by the outer part of the strap.

SPAENAUR No.	Colour	Strap Width	Strap Thickness	PKG QTY.
122-A01-1M	Black	40 mm	1.4 to 1.5 mm	10


CORD BUCKLE

Holder and locking wheel supplied separately.

Used for bags and clothing. E.g. rucksacks, duffel bags, laundry bags, sleeping bag covers, anoraks, swimming trunks, sou'westers.

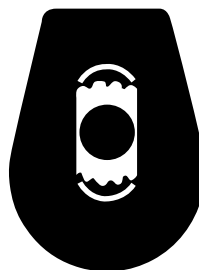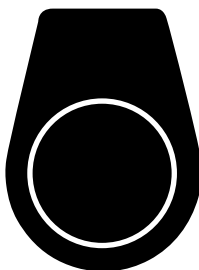

All Buckles have White Locking Wheel

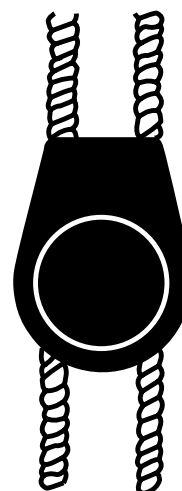

PKG QTY. 25

For Cord Size	SPAENAUR No.	
	WHITE	BLACK
2 mm	122-652	122-655
3-4 mm	122-660	122-663

MOUNTING: After threading the cord through the holder, push in the locking wheel. Knot the ends of the cord.

