

Inch

Heat Shrink Tubing

Pouce

Tube thermorétractable



Heavy Wall HEAT SHRINK Tubing

With Sealant

Heavy Wall Polyolefin Heat Shrinkable Tubing has a 3:1 shrink ratio. Application of heat causes an adhesive liner to melt and form intimate contact with all underlying surfaces and voids, yielding a watertight seal suitable for underground applications.

Heavy Wall Tubing is recommended for protecting and insulating splices and terminations and meets UL Standard 486D requirements.



SPAENAUR No.	Wire Range	Colour	Max. Wall Thickness	I.D. in Inch		Length	PKG QTY.
				*Exp.	▲Rec.		
622-037	8-1	BLACK	.105"	.750"	.220"	1-1/2"	10
622-038	8-1	RED	.105"	.750"	.220"	1-1/2"	10
622-039	2-4/0	BLACK	.120"	1.100"	.375"	1-1/2"	10
622-040	14-6	BLACK	.060"	.400"	.150"	6"	5
622-041	14-6	RED	.060"	.400"	.150"	6"	5
622-042	2-4/0	BLACK	.120"	1.100"	.375"	6"	5
622-043	2-4/0	RED	.120"	1.100"	.375"	6"	5
622-044	2-4/0	BLACK	.120"	1.100"	.375"	12"	5
622-045	2-4/0	RED	.120"	1.100"	.375"	12"	5

*Exp. = Expanded


▲ Rec. = Recovered



Thin Wall HEAT SHRINK Tubing

Thin Wall Heat Shrinkable Tubing is opaque tubing with a 2:1 shrink ratio. It can be used as electrical insulation over cable splices and terminations, and for wire harness covering, bundling and wire marker identification. It may also be easily assembled over components, connectors or other irregular shapes.

Thin Wall products meet or exceed the requirements of MIL-1-23053D/5, Class I, II, and III, AMS 3636C and AMS 3637B, are U.L. recognized, and CSA certified.

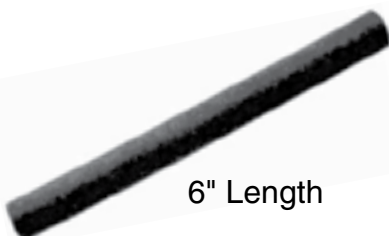

6" Length



Roll - 100 Ft.

Cut Lengths and Bulk Roll - BLACK

SPAENAUR No. 6" Length	PKG QTY.	SPAENAUR No. Bulk Roll	PKG QTY.	Max. Wall Thickness	I.D. in Inches *Exp.	▲Rec.
622-046	10	622-059	100 ft. rl.	.020"	.125"	.062"
622-047	10	622-056	100 ft. rl.	.020"	.187"	.093"
622-048	10	622-057	250 ft. rl.	.025"	.250"	.125"
622-049	10	—	—	.025"	.312"	.156"
622-050	10	622-058	200 ft. rl.	.025"	.375"	.187"
622-051	10	—	—	.025"	.500"	.250"
622-052	10	—	—	.035"	1.000"	.500"

*Exp. = Expanded

▲ Rec. = Recovered

Cut Lengths and Bulk Roll - COLOUR CODED

SPAENAUR No. 6" Length	PKG QTY.	Colour	Wire Range	Max. Wall Thickness	I.D. in Inches *Exp.	▲Rec.
622-053	10	RED	22-18	.020"	.125"	.062"
622-054	10	BLUE	16-14	.025"	.250"	.125"
622-055	10	YELLOW	12-10	.025"	.312"	.156"

*Exp. = Expanded

▲ Rec. = Recovered