

Lanyards / Press-Lock Rivets



Inch

Cordons / Rivets à pression

Pouce

Nylon Lanyards

Keep pins, fasteners and other components where they belong with Nylon Lanyards. This low-cost alternative to steel lanyards offers light-duty retention and loss prevention. Available from stock in various styles and lengths. Made from "Super Tough" ST801 Zytel Nylon.

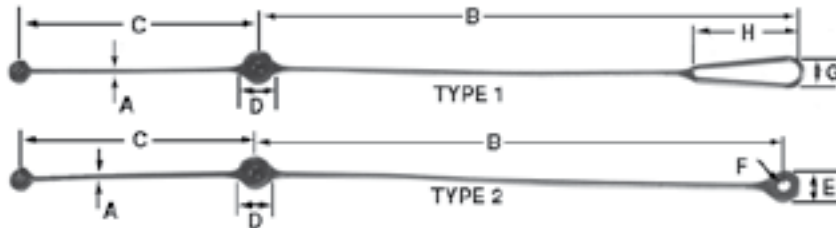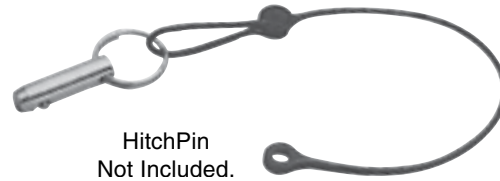

U-Lock Style

One end is a loop, supplied open. Attach to component, then "snap" together! Loop is permanently locked. Available with either a molded loop or eyelet on the other end.


| Spaenaur No. | Type | A | B | C | D | E | F | G | H | Approx. Break Strength | Assembled Length |
|--------------|------|-------|----|----|-------|-------|-------|------|------|------------------------|------------------|
| 086-049 | 1 | .093" | 8" | 4" | .500" | | | .340 | 1.50 | 35 lbs. | 10" |
| 086-F43-1K | 2 | .093" | 8" | 4" | .500" | .473" | .200" | | | 35 lbs. | 10" |
| 086-043 | 2 | .093" | 8" | 4" | .500" | .473" | .260" | | | 35 lbs. | 10" |

PKG QTY. 10

Fixed End Style

Supplied in either Type 1, Type 2, or Type 3 configurations with molded (fixed) loops and eyelets. Attach loop to rings of pins being retained. Rivet eyelet to equipment. Or, devise your own methods of attachment. These three styles offer limitless possibilities!

| Spaenaur No. | TYPE | B O/A Lgth. | C Eye Hole |
|--------------|--------|-------------|------------|
| 086-050 | Type 1 | 6.00" | N/A |
| 086-051 | Type 1 | 8.00" | N/A |
| 086-052 | Type 2 | 6.00" | .260" |
| 086-053 | Type 2 | 8.00" | .260" |
| 086-054 | Type 2 | 12.00" | .260" |
| 086-055 | Type 3 | 6.00" | .260" |

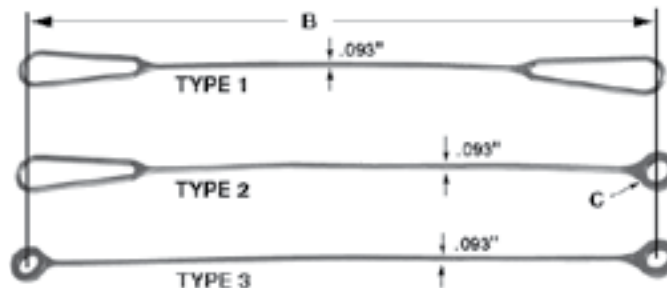


PKG QTY. 10

Press-Lock Rivets

Press-Lock Rivets are a one-piece moulded "rivet" to be used in conjunction with Nylon Lanyards. Insert through eyelet end of Lanyard and press into threaded, non-threaded, drilled or punched holes. Ribs deflect upon insertion and spring back for a secure lock. Made from 6/6 nylon in natural colour.

| Spaenaur No. | Recommended Hole Size | A | B | C |
|--------------|-----------------------|-------|-------|-------|
| 086-044 | .250" | .625" | .125" | .500" |
| 086-045 | .250" | .750" | .250" | .500" |



PKG QTY. 10

E