

Anti-Vibration Mounts

Supports antivibratoires




Metric

Métrique


Vibration Mounts OF VULCANIZED NR (NATURAL RUBBER)
DUROMETER 50-60

THE STEEL COMPONENTS ARE ZINC OR CADMIUM PLATED,
USUALLY WITH DICHROMATE FINISH



Style No. 3
SINGLE-ENDED Tapered


Metric Coarse Thread



Style No. 4
SINGLE-ENDED Cylindrical

SPAENAUR No.	STYLE No.	D Diameter mm	d Dia. mm	H Height mm	G Thread	L Length mm	PKG QTY.
316-H09-1W	3	50	38	52	M10 x 1.50	20	10
316-075	4	15	-	15	M4 x 0.70	11	20
316-H02-1A	4	20	-	20	M6 x 1.00	15	25
316-077	4	30	-	-	M8 x 1.25	23	10
316-079	4	30	-	30	M8 x 1.25	23	10

■ This Is Not A PEquality Product

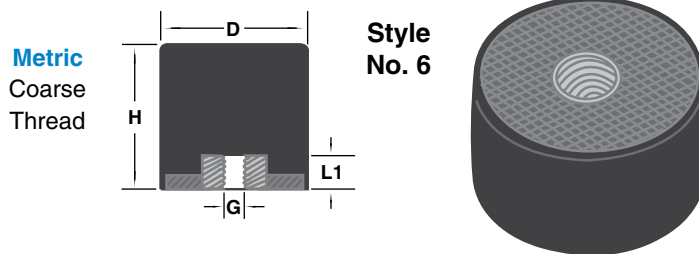


Metric Coarse Thread

Style No. 6


SINGLE INSERT - Cylindrical

SPAENAUR No.	STYLE No.	D Diameter mm	H Height mm	G Thread	L1 Length mm	PKG QTY.
316-025	6	20	15	M6 x 1.00	6	25
316-026	6	30	30	M8 x 1.25	7	20



Metric Coarse Thread

Style No. 7
Cylindrical with TWIN INSERTS



SPAENAUR No.	STYLE No.	D Diameter mm	H Height mm	G Thread	L1 Length mm	PKG QTY.
316-057	7	10	10	M4 x 0.70	4	25
316-058	7	10	15	M4 x 0.70	4	25
316-027	7	15	15	M4 x 0.70	4	25
316-028	7	25	25	M6 x 1.00	7	20
316-059	7	25	30	M6 x 1.00	7	20
316-029	7	30	30	M8 x 1.25	7	20
316-030	7	40	40	M8 x 1.25	7	10
316-060	7	40	30	M10 x 1.50	10	10
316-061	7	50	30	M10 x 1.50	11	10
316-067	7	100	55	M16 x 2.00	16	1



ALL MOUNTS ON THIS PAGE ARE OF VULCANIZED NR NATURAL RUBBER, IN DUROMETER 50-60

Vibration Mounts

THE STEEL COMPONENTS ARE ZINC OR CADMIUM PLATED, USUALLY WITH DICHROMATE FINISH




**Style No. 1
DOUBLE-ENDED**

All Dimensions in Millimetres

Metric Coarse Thread

SPAENAUR No.	D Diameter	H Height	G Thread	L Length	PKG QTY.
316-001	10	10	M4 X 0.70	10	25
316-036	10	15	M4 X 0.71	10	25
316-034	15	15	M4 X 0.72	10	25
316-039	15	15	M5 X 0.80	15	25
316-003	20	20	M6 X 1.00	15	25
■316-H08-1K	25	10	M6 X 1.00	20	4
316-H03-2P	25	15	M6 X 1.00	20	25
316-047	25	40	M6 X 1.00	20	10
316-046	25	30	M8 X 1.25	20	10
316-005	30	20	M8 X 1.25	20	20
316-H01-1X	40	30	M8 X 1.25	23	4
316-007	50	20	M10 X 1.50	30	10
316-008	50	30	M10 X 1.50	30	10
316-051	75	40	M12 X 1.75	37	2
316-064	75	50	M12 X 1.75	37	2
316-009	75	55	M12 X 1.75	37	2
316-010	100	60	M16 X 2.00	37	1


■ This Is Not A PEquality Product

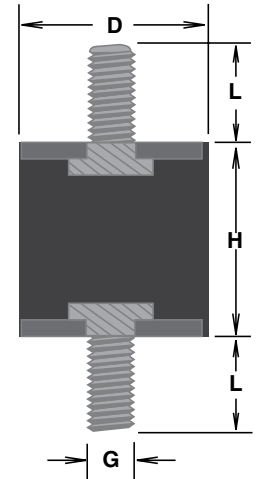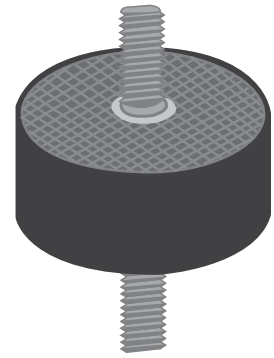

**Vibration Mounts
Style No. 2
SINGLE ENDED**

Plus
Threaded Insert

All Dimensions in Millimetres

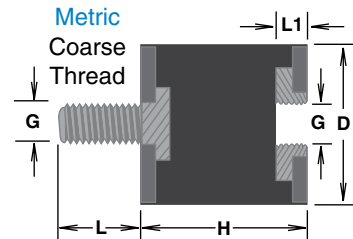

This style has threaded insert opposite stud end

SPAENAUR No.	D Diameter	H Height	G Thread	L Length	L1 Length	PKG QTY.
316-H10-1K	15	15	M4 x 0.70	10	4	25
316-065	20	15	M6 x 1.00	15	6	25
316-012	20	20	M6 x 1.00	15	6	25
■316-H07-1T	30	30	M8 x 1.25	20	7	4
316-069	40	30	M8 x 1.25	20	7	10
316-052	50	20	M10 x 1.50	30	11	10
316-015	50	40	M10 x 1.50	30	11	4
316-054	75	40	M12 x 1.75	37	13	2
316-016	75	50	M12 x 1.75	37	13	2
316-056	75	55	M12 x 1.75	37	13	2

■ This Is Not A PEquality Product