


Inch and Metric

Bits / Tool Organizers

Pouce et Métrique

Embouts / Rangements pour outils

Insert Bits Alloy Steel Top Quality, extra hard (Grey) <i>Not for use with power drivers.</i>		PKG QTY. 1												
		Bit Point Size	SPAENAUR No.											
1/4" hex shanks, 1" long, available in no's. 0 through 3 points; 5/16" hex shanks are 1-1/4" long, in sizes 1 through 4.		1" L x 1/4" H	1-1/4" L x 5/16" H											
		0	876-140											
 <table border="1"> <thead> <tr> <th>Point</th> <th>Screws</th> </tr> </thead> <tbody> <tr> <td>No. 1</td> <td>No. 1 to 4</td> </tr> <tr> <td>No. 2</td> <td>No. 5 to 10</td> </tr> <tr> <td>No. 3</td> <td>No. 12 to 16</td> </tr> <tr> <td>No. 4</td> <td>3/8"</td> </tr> </tbody> </table>		Point	Screws	No. 1	No. 1 to 4	No. 2	No. 5 to 10	No. 3	No. 12 to 16	No. 4	3/8"	1	876-141	876-144
		Point	Screws											
		No. 1	No. 1 to 4											
		No. 2	No. 5 to 10											
No. 3	No. 12 to 16													
No. 4	3/8"													
2	876-142	876-145												
3	876-143	876-146												
4	—	876-147												
1/4" and 5/16" hex shank models for slotted screw sizes 0 through 14. Lengths 1" and 1-1/2".		1-1/2" x 5/16"	—											
		4-6	876-148	876-152										
		6-8	876-149	—										
		10	876-150	876-154										
		12	876-151	876-155										
		14	876-888 (1-1/2" long)	—										
1/4" and 5/16" hex shanks, 1" to 1-1/4" long. Point sizes: 1PZD through 4PZD.		1-1/4" x 5/16"	—											
		1	876-156	876-159										
		2	876-157	876-160										
		3	876-158	876-161										
		4	—	876-162										
1/4" hex shanks, 1" long. Point sizes: 0, 1, 2, 3, 4, 5, & 6.		0	876-1631	—										
		1	876-218	—										
		2	876-1634	—										
		3	876-1635	—										
		4	876-1636	—										
		5	876-1637	—										
		6	876-1638	—										
1/4" hex shanks only, in 1" length. Point sizes: 0, 1, 2, 3 & 4.		0	876-821	—										
		1	876-163	—										
		2	876-164	—										
		3	876-165	—										
		4	876-1048	—										
1/4" and 5/16" hex shanks, 1" and 1-1/8" long. Socket sizes: 1/16" to 5/16".		Hex Size	1-1/8" x 5/16"	—										
		1/16"	876-178	—										
		5/64"	876-179	—										
		3/32"	876-180	—										
METRIC Hex Socket Driver Bits Extra Hard Alloy Steel - Grey All bits 25 mm x 6.3 mm (1" x 1/4") hex shank.		7/64"	876-181	—										
		1/8"	876-889	—										
		9/64"	876-182	—										
		5/32"	876-825	876-183										
		3/16"	876-826	876-184										
		7/32"	876-827	876-185										
		1/4"	876-752	—										
		5/16"	876-753	—										



LOW PROFILE HEX RECESSED SOCKET BITS

Fit 1/4" Hex Shanks


Overall Length 1-1/4" All Sizes

- Specially designed for hard-to-reach hex heads
- Perfect for use with the angle or inline driver
- Transfers magnetic pickup for holding fasteners
- 7 standard hex sizes combination SAE/Metric

SPAENAUR No.	Across Flats Inch	Metric
876-785	3/16"	5 mm
876-784	7/32"	5.5 mm
876-783	1/4"	—
876-781	5/16"	8 mm
876-780	3/8"	—
876-779	—	10 mm

HEX RECESSED MAGNETIC DRIVER

1/4" Hex Shank



Generally used on Self-drilling Construction Fastener Screws.

SPAENAUR No.	Across Flat Size	O/A Lgth.
T-208A	1/4"	1-11/16"
876-876	1/4"	2-9/16"
T-208B	5/16"	1-11/16"
876-877	5/16"	2-9/16"
876-198	3/8"	1-3/4"
876-878	3/8"	2-9/16"
876-875	7/16"	1-3/4"
876-199	7/16"	2-9/16"

All Bits on this page are NOT for use with power tools.


All Bits - PKG QTY. 1

INSERT BIT ORGANIZER

SPAENAUR No. 876-819

Moulded of strong, flexible plastic that won't let your bits fall out even if you toss the organizer on your work bench or in your tool box.

Approximate O/A Dimensions: 3-9/16" L x 1-15/16" W x 13/16" H



Holds up to 36 Bits - 1/4" or 5/16" Hex Shank
Centre divider will hold adapters or extensions up to 3" in length.


PKG QTY. 1
(Bits not included)

Security Bits



Inch and Metric

Mèches de sécurité

Pouce et Métrique

INSERT BITS FOR "SPANNER" (drilled head) SCREWS	SPAENAUR No.	For Screw Size	C to C Across Tips	Bit Size	PKG QTY. 1
 <p>See pages B105 and B106 for Spanner Screws.</p> <p>For 1/4" Hex, use Driver 876-129 (Pg.17) 876-131</p> <p>For 5/16" Hex, use Driver 876-130 (Pg.17)</p> <p>Do NOT use Bit with Power Driver</p>	876-991	No. 4 size	3/32"	5/16" Hex x 1-1/2" Lgth.	
	876-190	No. 6 size	1/8"	1/4" Hex x 1" Lgth.	
	876-191	No. 8 size	5/32"	1/4" Hex x 1" Lgth.	
	876-999	No. 8 size	5/32"	5/16" Hex x 1-1/2" Lgth.	
	876-F56-1T	No. 10 size	3/16"	1/4" Hex x 1" Lgth.	
	876-992	No. 12 size	7/32"	5/16" Hex x 1-1/2" Lgth.	
	876-193	1/4", 5/16", 3/8"	1/4"	5/16" Hex x 1-1/2" Lgth.	

WARNING: "Spanner" Insert Bits are **NOT GUARANTEED** against breakage or wear because of their extremely hard points.

 <p>HEX SOCKET SECURITY BITS</p> <p>1/4" Hex</p> <p>PKG QTY. 1</p>	SPAENAUR No.	ACROSS FLATS	FITS BUTTON HEAD	FITS FLAT HEAD	<p>PKG QTY. 1</p> <p>"SPANNER" BITS</p> <p>METRIC - Heat Treated</p> <p>5/16" Hex. (*1/4" Hex.)</p>  <p>*877-692 for M3 screws 877-689 for M3 screws 877-691 for M5 screws 876-193 for M6 screws</p>
	876-835	3/32"	#4	#4	
	876-769	1/8"	#6	#6	
	876-770	5/32"	#8, #10, #14, and 1/4"	#8, #10, #14, and 1/4"	
	876-771	3/16"	5/16"	5/16"	
	876-772	7/32"	3/8"	3/8"	

PHILLIPS SECURITY BITS	SPAENAUR No.	SPAENAUR No.	
	876-773	876-1573	1/4" Hex
	Phillips #2 Pin-Head Bits fit sizes #6 to #10 screws.	Phillips #3 Pin-Head Bits fit sizes #12 to 1/4" screws.	


All Bits shown above are **NOT** for use with power tools.

POWER BITS

to fit most popular makes of air and electric drivers.

Extra hard Steel - Grey Finish 1/4" Hex Shank

PKG QTY. 1


Phillips	Sq. Recess	Point Size	Overall Length	Slotted	Screw Size	Blade Thickness	Body Diameter
SPAENAUR No.	SPAENAUR No.			SPAENAUR No.			
876-1137	876-1428	1	2"	876-844	4 - 5	.034"	.187"
876-838	876-841	1	2-3/4" - 3"	876-845	6 - 7	.038"	.250"
876-1139	876-1429	1	6"	876-846	8 - 10	.042"	.275"
876-1140	876-1652	2	2"	876-847	10 - 12	.046"	.312"
876-839	876-842	2	2-3/4" - 3"	876-848	12 - 14	.050"	.360"
876-1155	876-1135	2	6"	 <p>All slotted power bits are 3" overall length. See page P15 for Torx® Power Bits.</p>			
876-1185	876-1653	3	2"				
876-840	876-843	3	3"				
876-1186	876-1136	3	6"				

FLEX-A-BIT™

Flexible Extension Shaft

Flexes to approximately 90 degrees! Safe at any speed! Outer sleeve does not rotate. Use with all cordless screwdrivers, drills, air tools, electric drills or hand drivers. For greater lengths, connect 2, 3 or 4 FLEX-A-BITs™ together!

SPAENAUR No.	Torque Rating	Length	Description
876-879	3.5 ft/lb.	7-1/2"	1/4" Male x 1/4" Female Hex Drive
876-880	3.5 ft/lb.	11"	1/4" Male x 1/4" Female Hex Drive
876-881	13 ft/lb.	11"	1/4" Male x 1/4" Female Hex Drive - Heavy Duty
876-882	13 ft/lb.	11"	1/4" Male x 1/4" Female Square Drive - Heavy Duty
876-883	13 ft/lb.	11"	3/8" Male x 3/8" Female Square Drive - Heavy Duty



Not for use with power drivers.


TORX®
Sq. Socket
Drive
Bits



TORX®
Insert Bits
Extra hard



TORX® Power Bits

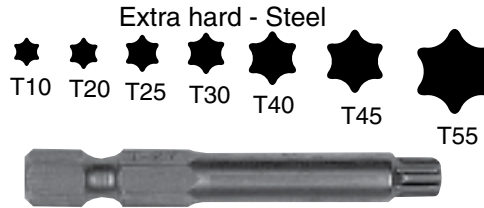

Bit Size	1/4" & 3/8" Sq. Drive		Overall Length											
			1"		1-1/4"		2"		2-3/4"		3-1/2"		6"	
			1/4" Hex Shank	5/16" Hex Shank	1/4" Hex Shank	5/16" Hex Shank	1/4" Hex Shank	5/16" Hex Shank	1/4" Hex Shank	5/16" Hex Shank	1/4" Hex Shank	5/16" Hex Shank	1/4" Hex Shank	5/16" Hex Shank
Sq. Dr.	SPAENAUR No.	SPAENAUR No.	SPAENAUR No.	SPAENAUR No.	SPAENAUR No.	SPAENAUR No.	SPAENAUR No.	SPAENAUR No.	SPAENAUR No.	SPAENAUR No.	SPAENAUR No.	SPAENAUR No.		
T-7	—	—	876-620	—	—	—	—	—	—	—	—	—	—	
T-8	—	—	876-166	—	—	876-627	876-635	876-643	876-299	—	—	—	—	
T-9	1/4"	876-321	876-167	—	—	—	—	—	—	—	—	—	—	
T-10	1/4"	876-322	876-168	—	—	876-628	876-636	876-644	876-310	—	—	—	—	
T-15	1/4"	876-323	876-169	—	—	876-629	876-637	876-645	876-301	—	—	—	—	
T-20	1/4"	876-324	876-170	—	—	876-630	876-638	876-646	876-302	—	—	—	—	
T-25	1/4"	876-325	876-171	—	—	876-631	876-639	876-647	876-303	—	—	—	—	
T-27	1/4"	876-326	876-172	—	—	876-632	876-640	876-648	—	—	—	—	—	
T-30	1/4"	876-327	876-173	876-175	—	876-633	876-641	876-649	876-305	—	—	—	—	
T-40	3/8"	876-328	876-174	876-176	—	876-634	876-642	876-298	876-306	—	—	—	—	
T-45	3/8"	876-329	—	876-621	—	—	—	—	—	—	—	—	—	
T-50	3/8"	876-330	—	876-177	—	—	—	—	—	—	—	—	—	
T-55	3/8"	876-331	—	876-622	—	—	—	—	—	—	—	—	—	

PKG QTY. 1 - All Items This Page

TORX® INTERCHANGEABILITY TABLE

TORX Sizes	TORX Socket		TORX Socket			TORX Socket Pan and Oval Heads			
	Set Screw	Head Cap Screw	Button Head Cap Screw	Flat Head Cap Screw	Pressure Plug	Machine Screw		Tapping Screw	
						INCH Sizes	METRIC Sizes	INCH Sizes	METRIC Sizes
T-7	#6					#2			
T-8	#8		#4			#3	2.5		
T-9				#4		#4		#4	
T-10	#10	#4, #5	#6	#5		#5		#4, #5	2.9
T-15		#6	#8	#6		#6, #8	3.5, 3.9	#6, #8	3.5, 3.9
T-20	1/4"			#8		#8	4.2, 4.8	#8, #10	4.2, 4.8
T-25		#8	#10	#10		#10	5.	#10	
T-27	5/16"	#10	1/4"		1/16"	#12		#12	
T-30	3/8"	1/4"		1/4"	1/8"	1/4"	5.5, 6.3	1/4"	5.5, 6.3
T-40			5/16"	5/16"		5/16"	7., 8.	5/16"	7., 8.
T-45	1/2"	5/16"	3/8"	3/8"	1/4"	3/8"		3/8"	
T-50		3/8"		7/16", 1/2"		7/16"	10.	7/16"	10.
T-55		7/16", 1/2"	1/2"	5/8"	3/8"				
T-60			5/8"	3/4"					
T-70		5/8"							
T-90		3/4"							

Screwdrivers / Wrenches / Drive Bits

Inch

Tournevis / Clés / Embouts de tournevis

Pouce



**TORX®
DRIVE SYSTEM**



TORX SCREWDRIVERS

with Plastic Handle

Sizes available individually or in a set.

The Torx Drive System is a 6-point fastening system which maximizes the driving surface for longer drive life, while maximizing torque, reducing slippage, and minimizing worker fatigue. Sometimes called the "Star" fastener, because of its likeness to the shape of a star, this fastening system is used on most late-model cars. Several often-replaced vehicle parts, such as headlights, tail-lights, turning signal lights, and exterior trim areas, will utilize the Torx System.

Appliances, television sets, washers, dryers, toasters, and vacuum cleaners will also utilize the Torx System.

SPAENAUR No.	Torx Bit Size	PKG QTY.
876-607	T8	1
876-619	T9	1
876-609	T15	1
876-610	T20	1
876-611	T25	1
876-612	T27	1
876-613	T30	1
876-614	T40	1
876-615	T45	1
876-616	T50	1

TORX DRIVE BITS - Page P15.

TORX® TAMPER-RESISTANT BITS and DRIVERS for Recessed Tamper-Resistant Screws

The tamper-resistant TORX drive has a post in the centre of its recess which requires a specially mated driver to remove the fastener. Unauthorized removal is prevented.

PKG QTY. 1

Torx Recess Size	SPAENAUR NUMBERS LISTED BELOW		
	Approx. O/A Lgth.	HAND DRIVER with integral Bit and plastic handle	*INSERT BIT 1/4" Hex - 1" long ▲5/16" Hex - 1-1/4" long
TR7	7"	876-F16-1C	—
TR8	5-7/8"	876-1705	876-890
TR9	4-1/2"	876-F53-1Y	876-891
TR10	5-7/8"	876-1707	876-348
TR15	6-7/8"	876-345	876-349
TR20	6-7/8"	876-1708	876-823
TR25	7-3/4"	876-346	876-350
TR27	8"	876-347	876-351
TR30	7-1/2"	876-1709	876-892
TR40	8-1/2"	876-1710	876-893
TR45	8-1/2"	876-1711	▲876-1792
TR50	8-1/2"	—	▲876-1793

KEY WRENCH
Short Arm drilled both ends
Alloy Steel



See pages B111 to B115 for screws.

*Insert Bit not for use with Power Driver.



(Bits not included.)

(Hollow handle for storing bits.)

NOTE: SPANNER and TORX "Tamper Resistant" tools, are NOT guaranteed against overtorque, misuse, breakage or wear.

All Bits and Tools
PKG QTY. 1

Spenaaur No.	Magnetic Driver Handles
876-129 876-131	for 1/4" hex bits shown in chart.
876-130	for 5/16" hex bits shown in chart.

P