

Inch

Spring Bolts / Finger Latch Bolts

Pouce

Boulons à ressort / pènes à crochet

Spring Bolt


This spring-loaded bolt uses a 3/8 inch steel rod, tapered at the leading end, and retained within a steel case. Bolt withdraws by 0.75 inch and is retained by inset pins.

SPAENAUR No. 099-300

Dimensions:

Body Length	2-7/16"
Body Width	2"
Height	15/16"
Holes Center to Center Length	1-5/32"
Holes Center to Center Width	1-7/16"
Hole Diameter	4 Holes 1/4" Dia.

Steel, Zinc Finish

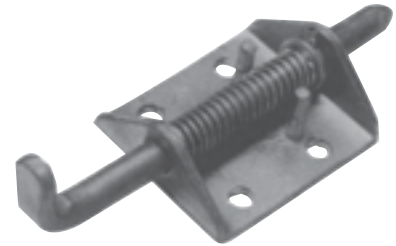

PKG QTY. 1

Moulded Slam Latch

'Fix-through' design, totally corrosion-resistant with stainless steel spring.


SPAENAUR No. 099-421

The latch is designed to be mounted through the fixing holes in the body and operated by rod or cable. The slotted bolt pull area provides 'lost motion' so that the latch can always retract, even when the operating system is in 'locked' position.

Black Acetal Copolymer Textured Finish



PKG QTY. 1

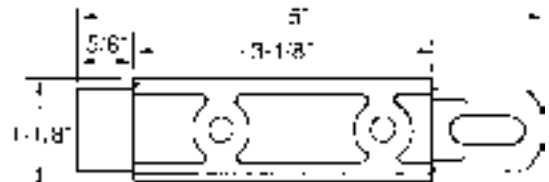

O/A Thickness (body height) 3/4"

Compact, slim style will suit narrow door pillars, sections and channels.



EBERHARD
HARDWARE MANUFACTURING LTD.

Finger Hook Latch Bolts

SPAENAUR No. D-3202A

(Mfr. #2-565697)

PKG QTY. 1

(Offset Type)



Steel, Zinc Plated

- 2" width of case
- 2-5/8" length of case
- 3/4" width of slide bolt
- 5/8" projection of slide bolt
- 4-7/8" length overall
- 9/16" offset from back of case to bolt
- 11/16 oz. weight each
- Holes for No. 10 Screws.

SPAENAUR No. D-4037

(Mfr. #565692)

PKG QTY. 1

"Slamtite" Tapered Bolt



Steel, Zinc Plated

- 2" width of case
- 2-5/8" length of case
- 3/4" width of slide bolt
- 1-7/8" projection of slide bolt
- 6-3/8" length overall
- 13/16 lb. weight each
- Steel striker plate furnished as shown.
- Holes for No. 10 screws.

SPAENAUR No. D-4052

(Mfr. #5597)

PKG QTY. 1

Steel, Zinc Plated



- 4-11/16" length overall
- Weight 1/4 lb.
- Ideal latches for drawers and small cabinets.

Have light six pound springs, easily actuated.

- 1-5/8" width of case
- 2" length of case
- 1/2" width of slide bolt
- 9/16" projection of slide bolt
- 1/2" width of hook member
- 7/8" height of finger hook