

**Bell-Mouth Strain-Relief Nylon Bushings / Pliers**


Inch

**Manchons en nylon de détente pour orifice évasé / Pinces**

Pouce




# Bell-Mouth Strain Relief Bushings

Nylon




These nylon Bushings not only have Strain Relief protection but also provide an important innovation — a widely flared exit hole for the cable so as to help you meet the new and more demanding cable flexing requirements.

These parts have the basic Strain Relief Bushings design — fit the same cable sizes and use the same mounting holes. Then, the flared extension prevents your cable from bending sharply, eases the cable into a lazy bend assuring longer life for the cable and your product.



PKG QTY. 50




**FOR FLAT CABLES**

SPAENAUR No. and Color	UL/CSA DESCRIPTION	WILL FIT THESE WIRES			CHASSIS DIMENSIONS			D BODY LENGTH	G HEAD LENGTH
		TYPE	Gauge/ Conductors	SIZE	A Mounting Hole Dia.	B To Prevent Rotation	MAXIMUM THICKNESS		
315-762 (Black)	SR-2P-5	CLOCK	20/2	.09" x .18"	.375"	.330"	.062"	5/8"	3/8"
315-763 (White)		SPT-1	18/2	.11" x .21"					
315-764 (Black)	SR-3P-5	SPT-1	18/2	.12" x .22"	.437"	.390"	.062"	45/64"	13/32"
315-765 (White)		SPT-1	18/2	.12" x .22"					
315-766 (Black)	SR-4N-5	SPT-1	18/3	.12" x .30"	.500"	.465"	.062"	45/64"	13/32"
315-767 (White)		SPT-2	18/2	.15" x .28"					
		& HPN	16/2	.16" x .30"					

**FOR ROUND CABLES**

315-768 (Black)	SR-5N-5	SV & SVT	18/2	.250"	.500"	.450"	.062"	11/16"	13/32"	
			18/3	.255"	.500/.515"					
315-769 (White)		HPD	18/2	.270"	.500"	.625"	.550"	.062"	13/16"	13/32"
			16/2	.290"	.500/.515"					
315-779 (Black)	SR-6N3-5	SJ, SJO & SJT	16/2	.325"	.625"	.550"	.062"	13/16"	13/32"	
			18/3	.330"						
			14/2	.350"						
			16/3	.355"						
			18/4	.360"						



Maximum Chassis Thickness—Part actually has additional clearance

**876-196 HAND PLIERS**

Adjustable for all Strain Relief Bushings that assemble into holes up to 7/8" diameter.

PKG QTY. 1

**876-399**

Replacement Spring only for Hand Plier 876-196.

PKG QTY. 1



**876-197 HAND PLIERS**

For use with Strain Relief Bushings that assemble into 3/4" and larger diameter holes. Pliers are adjustable.

PKG QTY. 1

Inch

Strain Relief Bushings / Nylon Straight-Thru / Metal

Pouce

Manchons antitraction / Raccord traversant en nylon / Métal




# Straight-Thru Strain Relief Bushings

Nylon



Protect the life of your electric/electronic products by absorbing forces of pull, push and twist.

Securely anchor, insulate and protect cables at chassis entry points.

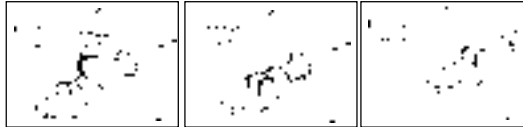

Maximum Chassis Thickness—Part actually has additional clearance

PKG QTY. 50



FOR FLAT CABLES

SPAENAUR No. and Color	UL/CSA DESCRIPTION	WILL FIT THESE WIRES			CHASSIS DIMENSIONS			D BODY LENGTH
		TYPE	Gauge/Conductors	SIZE	A Mounting Hole Dia.	B To Prevent Rotation	MAXIMUM THICKNESS	
315-741 (Black)	SR-3P-4	SPT-1	18/2	.12" x .22"	.437"	.390"	.062"	13/32"
315-781 (Black)	SR-4N-4	SPT-2 & HPN	18/2	.15" x .28"	.500"	.465"		

FOR ROUND CABLES

315-770 (Black)	SR-5N-4	SV & SVT	18/2	.250"	.500"	.450"	.062"	7/16"
			18/3	.255"	.500/.515"			
		HPD	18/2	.270"	.500"			
315-782 (Black)	SR-6P-4	SJ, SJO & SJT	18/2	.300"	.625"	.550"	.125"	37/64"
			16/2	.290"	.500/.515"			
315-784 (Black)	SR-6L-1	SJ, SJO & SJT	18/2	.300"	.625"	.550"	.156"	11/16"
			16/2	.325"	.656"			
			18/3	.330"	.687"			

# Metal Strain Relief Bushings

Other Styles Available

PKG QTY. 100



Absorb pull force only, to help meet UL and CSA requirements.

Designed to be attached to wire and cable inside of the chassis.

Permanent grip, non-slip design.

Easy assembly with recommended hand plier.

Made of zinc plated steel.

FOR ROUND CABLES

SPAENAUR No.	Description	WILL FIT THESE CABLES		PART DIMENSIONS		
		Type	Approximate Diameter	O	W	L
656-500	MSR-2A	SJ	.300/.343"	13/64"	25/32"	11/64"

