

**Tamper-Resistant Screws / Removal Tools**

Vis inviolables / Outils de démontage



Inch

Pouce

**B**



**ONE-WAY SLOT DRIVE**

Easy to insert - with slot screwdriver

Very difficult to remove

PKG QTY. 100

All Fasteners this page



| <b>STEEL</b>                       |                   |                   |               |
|------------------------------------|-------------------|-------------------|---------------|
| <i>ONE WAY SLOT MACHINE SCREWS</i> |                   |                   |               |
| <b>SPAENAUR No.</b>                | <b>Screw Size</b> | <b>Head Style</b> | <b>Finish</b> |
| <b>381-021</b>                     | 8-32 x 5/8"       | Round             | Zinc          |
| <b>381-013</b>                     | 8-32 x 3/4"       | Round             | Zinc          |
| <b>381-003</b>                     | 8-32 x 1"         | Oval              | Nickel        |
| <b>381-004</b>                     | 8-32 x 1"         | Round             | Nickel        |
| <b>381-012</b>                     | 10-24 x 3/8"      | Round             | Zinc Ch.      |
| <b>381-009</b>                     | 10-32 x 1/2"      | Round             | Zinc Ch.      |
| <b>381-010</b>                     | 10-32 x 3/4"      | Round             | Nickel        |

| <b>STEEL</b>                       |                   |                   |               |
|------------------------------------|-------------------|-------------------|---------------|
| <i>ONE WAY SLOT TAPPING SCREWS</i> |                   |                   |               |
| <b>SPAENAUR No.</b>                | <b>Screw Size</b> | <b>Head Style</b> | <b>Finish</b> |
| <b>516-001</b>                     | 6 x 3/4"          | Round             | Nickel        |
| <b>516-003</b>                     | 10 x 5/8"         | Round             | Nickel        |
| <b>516-005</b>                     | 10 x 3/4"         | Round             | Nickel        |
| <b>516-013</b>                     | 10 x 1"           | Round             | Zinc          |
| <b>516-006</b>                     | 12 x 1-1/2"       | Pan               | Nickel        |
| <b>516-008</b>                     | 14 x 3/4"         | Pan               | Nickel        |
| <b>516-010</b>                     | 14 x 2-1/2"       | Pan               | Nickel        |

**ONE-WAY ROUND HEAD MACHINE SCREWS, 18-8 STAINLESS STEEL**



| <b>Lgth.</b> | <b>1/4"</b>                                   | <b>3/8"</b>    | <b>1/2"</b>    | <b>3/4"</b>    | <b>1"</b>         | <b>1-1/4"</b>  | <b>1-1/2"</b>  | <b>2"</b>      |
|--------------|---|----------------|----------------|----------------|-------------------|----------------|----------------|----------------|
| <b>Dia.</b>  | <b>ORDER BY SPAENAUR NUMBERS LISTED BELOW</b> |                |                |                |                   |                |                |                |
| 4-40         |   |                | <b>381-964</b> | <b>381-965</b> | <b>381-966</b>    |                |                |                |
| 6-32         | <b>381-967</b>                                | <b>381-968</b> | <b>381-969</b> | <b>381-970</b> | <b>381-G08-1M</b> |                |                |                |
| 8-32         | <b>381-972</b>                                | <b>381-973</b> | <b>381-974</b> | <b>381-975</b> | <b>381-976</b>    | <b>381-977</b> | <b>381-978</b> |                |
| 10-24        |   | <b>381-979</b> | <b>381-980</b> | <b>381-981</b> | <b>381-982</b>    | <b>381-983</b> | <b>381-984</b> |                |
| 10-32        | <b>381-985</b>                                |                | <b>381-986</b> | <b>381-987</b> | <b>381-988</b>    | <b>381-989</b> | <b>381-990</b> |                |
| 1/4"-20      |   |                | <b>381-991</b> | <b>381-992</b> | <b>381-993</b>    | <b>381-994</b> | <b>381-995</b> | <b>381-996</b> |
| 5/16"-18     |   |                |                | <b>381-997</b> | <b>381-998</b>    |                | <b>381-999</b> |                |

**ONE-WAY ROUND HEAD SHEET METAL SCREWS, 18-8 STAINLESS STEEL**



|     |  |             |                 |                   |                 |                 |                   |                |
|-----|--|-------------|-----------------|-------------------|-----------------|-----------------|-------------------|----------------|
| 6A  |  |             | <b>516-889</b>  | <b>516-890</b>    | <b>516-891</b>  | <b>516-892</b>  |                   |                |
| 8A  |  |             | <b>516-893</b>  | <b>516-894</b>    | <b>516-895</b>  | <b>516-896</b>  | <b>516-897</b>    |                |
| 10A |  |             | <b>516-898</b>  | <b>516-899</b>    | <b>516-900</b>  | <b>516-901</b>  | <b>516-902</b>    |                |
| 12A |  | (*Pan Head) | <b>*516-903</b> | <b>*516-904</b>   | <b>*516-905</b> | <b>*516-906</b> | <b>*516-907</b>   |                |
| 14A |  |             | <b>516-909</b>  | <b>516-A02-1P</b> | <b>516-911</b>  | <b>516-912</b>  | <b>516-A03-1Y</b> | <b>516-914</b> |

**ONE-WAY OVAL HEAD SHEET METAL SCREWS, 18-8 STAINLESS STEEL**



|     |  |  |                |                |                |  |  |
|-----|--|--|----------------|----------------|----------------|--|--|
| 8A  |  |  | <b>516-915</b> | <b>516-916</b> | <b>516-917</b> |  |  |
| 10A |  |  | <b>516-918</b> | <b>516-919</b> | <b>516-920</b> |  |  |

Extremely hard points.

**UN-DO-IT SCREW TOOL**

Needed for removing "ONE-WAY SLOT" Machine Screws Only



PKG QTY. 1

**WARNING:** "Un-Do-It" Screw Drivers are **NOT GUARANTEED** against breakage or wear because of their extremely hard points.

| <b>SPAENAUR Driver No.</b> | <b>876-804</b> | <b>876-807</b> | <b>876-810</b>        |
|----------------------------|----------------|----------------|-----------------------|
| For Screw Sizes            | 4 to 8 ga.     | 10-12 ga.      | 14 ga. (1/4" & 5/16") |
| Points C. to C.            | 5/32"          | 7/32"          | 15/64"                |

CATALOG 14

SPAENAUR

Inch

Pouce



Machine Screws - Spanner Drive

Vis mécaniques – prise Spanner

|       |  |      |      |      |      |    |        |        |    |        |
|-------|--|------|------|------|------|----|--------|--------|----|--------|
| Lgth. | 1/4"                                   | 3/8" | 1/2" | 5/8" | 3/4" | 1" | 1-1/4" | 1-1/2" | 2" | 2-1/2" |
| Dia.  | ORDER BY SPAENAUR NUMBERS LISTED BELOW |      |      |      |      |    |        |        |    |        |



(82° Ctsk. Hd.)

**SPANNER OVAL HEAD MACHINE SCREWS, 18-8 STAINLESS STEEL**

|       |  |         |         |         |            |            |         |            |         |                             |
|-------|--|---------|---------|---------|------------|------------|---------|------------|---------|-----------------------------|
| 6-32  |  | 381-800 | 381-802 |         | 381-803    | 381-M33-1W | 381-805 | 381-G10-1M |         |                             |
| 8-32  |  |         | 381-807 |         | 381-M25-1P | 381-809    | 381-801 | 381-810    | 381-798 | 381-797<br>(Partial Thread) |
| 10-24 |  |         | 381-811 | 381-812 | 381-813    | 381-M26-1Y | 381-815 | 381-816    |         |                             |
| 10-32 |  |         | 381-817 | 381-818 | 381-M31-1T | 381-820    | 381-821 | 381-822    | 381-799 |                             |



(82° Ctsk. Hd.)

**SPANNER FLAT HEAD MACHINE SCREWS, 18-8 STAINLESS STEEL**

|          |         |         |         |         |            |         |         |         |            |  |
|----------|---------|---------|---------|---------|------------|---------|---------|---------|------------|--|
| 4-40     | 381-859 |         | 381-860 |         |            |         |         |         |            |  |
| 6-32     | 381-861 |         | 381-862 |         | 381-863    | 381-864 |         | 381-865 | 381-866    |  |
| 8-32     | 381-867 |         | 381-868 | 381-758 | 381-869    | 381-870 | 381-871 | 381-872 | 381-873    |  |
| 10-24    |         |         | 381-875 |         | 381-876    | 381-877 |         | 381-878 | 381-879    |  |
| 10-32    |         |         | 381-881 |         | 381-882    | 381-883 | 381-884 | 381-885 | 381-886    |  |
| 12-24    |         |         | 381-887 |         | 381-888    | 381-889 |         | 381-890 |            |  |
| 1/4"-20  |         | 381-891 | 381-892 | 381-893 | 381-G09-2X | 381-895 | 381-896 | 381-897 | 381-898    |  |
| 5/16"-18 |         |         |         |         | 381-899    | 381-900 |         | 381-901 | 381-M34-1M |  |
| 3/8"-16  |         |         |         |         | 381-903    | 381-904 |         | 381-905 |            |  |



**SPANNER PAN HEAD MACHINE SCREWS, 18-8 STAINLESS STEEL**

|         |         |         |            |         |            |            |            |            |         |         |
|---------|---------|---------|------------|---------|------------|------------|------------|------------|---------|---------|
| 4-40    | 381-906 | 381-907 | 381-908    |         |            |            |            |            |         |         |
| 6-32    | 381-909 | 381-910 | 381-911    | 381-912 | 381-M32-1K | 381-M27-1C | 381-915    | 381-916    | 381-917 |         |
| 8-32    | 381-918 | 381-919 | 381-920    | 381-921 | 381-922    | 381-923    | 381-924    | 381-925    | 381-926 |         |
| 10-24   | 381-927 | 381-928 | 381-929    | 381-930 | 381-931    | 381-932    | 381-933    | 381-M28-1N | 381-935 |         |
| 10-32   | 381-936 | 381-937 | 381-938    | 381-939 | 381-940    | 381-941    | 381-942    | 381-943    | 381-944 |         |
| 12-24   |         |         | 381-M24-1A |         | 381-M41-1C | 381-M29-2T |            |            | 381-948 | PKG     |
| 1/4"-20 |         | 381-949 | 381-950    | 381-951 | 381-952    | 381-953    | 381-M30-1N | 381-955    | 381-956 | QTY. 50 |



**SPANNER TRUSS HEAD MACHINE SCREWS, 18-8 STAINLESS STEEL**

|          |  |         |         |         |         |            |         |         |         |  |
|----------|--|---------|---------|---------|---------|------------|---------|---------|---------|--|
| 6-32     |  | 381-823 | 381-824 |         | 381-825 | 381-826    |         |         |         |  |
| 8-32     |  |         | 381-827 | 381-828 | 381-829 | 381-830    | 381-831 | 381-832 |         |  |
| 10-24    |  |         | 381-837 |         | 381-838 | 381-G06-1K |         |         |         |  |
| 10-32    |  |         | 381-833 |         | 381-835 | 381-836    |         |         |         |  |
| 1/4"-20  |  | 381-841 | 381-842 |         | 381-843 | 381-G05-1T | 381-845 | 381-846 | 381-847 |  |
| 5/16"-18 |  |         |         |         | 381-848 | 381-G07-1W | 381-850 | 381-851 |         |  |
| *3/8"-16 |  |         |         |         | 381-852 | 381-853    | 381-854 | 381-855 | 381-856 |  |

\*381-857 3" Long    \*381-858 3-1/2" Long



(82° Ctsk. Hd.)

**SPANNER OVAL HEAD MACHINE SCREWS, BRASS Plain Finish**

|       |  |         |         |         |         |         |         |         |         |  |
|-------|--|---------|---------|---------|---------|---------|---------|---------|---------|--|
| 6-32  |  | 381-516 |         |         | 381-518 | 381-519 |         |         |         |  |
| 8-32  |  |         | 381-521 |         | 381-522 |         | 381-524 | 381-525 | 381-526 |  |
| 10-24 |  | 381-533 | 381-534 |         | 381-535 | 381-536 |         | 381-537 |         |  |
| 10-32 |  |         | 381-527 | 381-528 | 381-529 | 381-530 |         | 381-531 | 381-532 |  |



(82° Ctsk. Hd.)

**SPANNER FLAT HEAD MACHINE SCREWS, BRASS Plain Finish**

|       |                          |  |         |  |         |         |  |         |  |  |
|-------|--------------------------|--|---------|--|---------|---------|--|---------|--|--|
| 6-32  | 381-502<br>(3/16" Lgth.) |  | 381-503 |  | 381-504 | 381-505 |  |         |  |  |
| 8-32  |                          |  | 381-506 |  | 381-507 |         |  | 381-509 |  |  |
| 10-24 |                          |  | 381-511 |  | 381-512 | 381-513 |  | 381-514 |  |  |

6-32 to 1/4"-20 dia. - PKG QTY. 100  
5/16" and 3/8" dia. - PKG QTY. 50

**B**

Sheet Metal/Machine Screws - Spanner Drive/Bits/Driver



Inch and Metric

Vis à tôle / Vis mécaniques – prise Spanner / embouts

Pouce et Métrique

B



(82° Ctsk. Hd.)

SPANNER FLAT HEAD SHEET METAL SCREWS, STEEL, Case-Hardened Zinc Plated

| Lgth.       | 1/4"  | 3/8" | 1/2" | 5/8" | 3/4"    | 1" | 1-1/4" | 1-1/2" | 2" |
|-------------|---|------|------|------|---------|----|--------|--------|----|
| <b>Dia.</b> | <b>ORDER BY SPAENAUR NUMBERS LISTED BELOW</b> |      |      |      |         |    |        |        |    |
| 8A/AB       |   |      |      |      | 381-151 |    |        |        |    |



(82° Ctsk. Hd.)

SPANNER OVAL HEAD SHEET METAL SCREWS, 18-8 STAINLESS STEEL

|        |  |  |         |  |         |         |         |         |  |
|--------|--|--|---------|--|---------|---------|---------|---------|--|
| 6A/AB  |  |  | 516-876 |  | 516-877 | 516-878 | 516-879 | 516-880 |  |
| 8A/AB  |  |  | 516-881 |  | 516-882 | 516-883 | 516-884 |         |  |
| 10A/AB |  |  | 516-885 |  | 516-886 | 516-887 | 516-888 |         |  |



(82° Ctsk. Hd.)

SPANNER FLAT HEAD SHEET METAL SCREWS, 18-8 STAINLESS STEEL

|        |         |         |            |         |         |         |         |         |         |
|--------|---------|---------|------------|---------|---------|---------|---------|---------|---------|
| 4A/AB  | 516-800 | 516-801 | 516-802    |         | 516-803 |         |         |         |         |
| 6A/AB  |         | 516-804 | 516-805    | 516-806 | 516-807 | 516-808 | 516-809 | 516-810 | 516-811 |
| 8A/AB  |         | 516-812 | 516-813    |         | 516-814 | 516-815 | 516-816 | 516-817 | 516-818 |
| 10A/AB |         |         | 516-819    | 516-820 | 516-821 | 516-822 | 516-823 | 516-824 | 516-825 |
| 12A/AB |         |         | 516-C43-1N |         | 516-827 | 516-828 | 516-829 | 516-830 | 516-831 |
| 14A/AB |         |         | 516-832    |         | 516-833 | 516-834 | 516-835 | 516-836 | 516-837 |



SPANNER PAN HEAD SHEET METAL SCREWS, 18-8 STAINLESS STEEL

|        |         |         |         |         |         |         |         |         |            |
|--------|---------|---------|---------|---------|---------|---------|---------|---------|------------|
| 4A/AB  | 516-838 | 516-839 | 516-840 |         | 516-841 |         |         |         |            |
| 6A/AB  |         | 516-842 | 516-843 | 516-844 | 516-845 | 516-846 | 516-847 | 516-848 | 516-849    |
| 8A/AB  |         | 516-850 | 516-851 |         | 516-852 | 516-853 | 516-854 | 516-855 | 516-856    |
| 10A/AB |         |         | 516-857 | 516-858 | 516-859 | 516-860 | 516-861 | 516-862 | 516-863    |
| 12A/AB |         |         | 516-864 |         | 516-865 | 516-866 | 516-867 | 516-868 | 516-C40-1P |
| 14A/AB |         |         | 516-870 |         | 516-871 | 516-872 | 516-873 | 516-874 | 516-875    |

DRIVERS FOR SPANNER (drilled head) SCREWS



O/A Lgth. 7-1/2"

| SPAENAUR No. | For Screw Size     | Points C. to C. |
|--------------|--------------------|-----------------|
| 876-F46-1W   | No. 4              | 3/32"           |
| 876-186      | No. 6              | 1/8"            |
| 876-187      | No. 8              | 5/32"           |
| 876-F01-2A   | No. 10             | 3/16"           |
| 876-994      | No. 12             | 7/32"           |
| 876-189      | 1/4", 5/16" & 3/8" | 1/4"            |

INSERT BITS FOR SPANNER SCREWS (drilled head)

Do NOT use Bit with Power Driver

| SPAENAUR No. | For Screw Size    | Bit Size                 | Points C. to C. |
|--------------|-------------------|--------------------------|-----------------|
| 876-991      | No. 4             | 5/16" Hex x 1-1/2" Lgth. | 3/32"           |
| 876-190      | No. 6             | 1/4" Hex x 1" Lgth.      | 1/8"            |
| 876-191      | No. 8             | 1/4" Hex x 1" Lgth.      | 5/32"           |
| 876-999      | No. 8             | 5/16" Hex x 1-1/2" Lgth. | 5/32"           |
| 876-192      | No. 10            | 1/4" Hex x 1" Lgth.      | 3/16"           |
| 876-992      | No. 12            | 5/16" Hex x 1-1/2" Lgth. | 7/32"           |
| 876-193      | 1/4", 5/16", 3/8" | 5/16" Hex x 1-1/2" Lgth. | 1/4"            |

WARNING: "Spanner" Screw Drivers and Insert Bits are NOT GUARANTEED against breakage or wear because of their extremely hard points.

Magnetic Screwdrivers - Hollow Handle (without Bits)



Bits can be stored in hollow handle

For 1/4" Hex, use Driver 876-129 876-131  
For 5/16" Hex, use Driver 876-130

SPANNER NUTS AND BITS



on page C62.



SPANNER FLAT HEAD (Metric Coarse Thread) MACHINE SCREWS, 18-8 STAINLESS STEEL

| Lgth. ▶                | 10 mm   | 12 mm   | 16 mm   | 20 mm   | 22 mm | 25 mm   | 30 mm   |
|------------------------|---------|---------|---------|---------|-------|---------|---------|
| <b>D I A M E T E R</b> |         |         |         |         |       |         |         |
| M3                     | 381-313 | 381-314 | 381-315 |         |       |         |         |
| M4                     | 381-316 | 381-317 | 381-318 | 381-319 |       | 381-320 |         |
| M5                     |         | 381-321 | 381-322 | 381-323 |       | 381-324 | 381-325 |



SPANNER PAN HEAD (Metric Coarse Thread) MACHINE SCREWS, 18-8 STAINLESS STEEL

|                        |         |         |         |         |  |         |                   |
|------------------------|---------|---------|---------|---------|--|---------|-------------------|
| <b>D I A M E T E R</b> |         |         |         |         |  |         |                   |
| M3                     | 381-300 | 381-301 | 381-302 |         |  |         |                   |
| M4                     | 381-303 | 381-304 | 381-305 | 381-306 |  | 381-307 |                   |
| M5                     |         | 381-308 | 381-309 | 381-310 |  | 381-311 | 381-312           |
| M6                     |         |         |         |         |  | 381-326 | (use bit 876-189) |

All Screws this page PKG QTY. 100  
All Tools and Bits - PKG QTY 1



877-689  
for M3 screws  
(5/16" Hex.)

SPANNER BITS METRIC - Heat Treated

Use with Magnetic Driver No. 876-130  
(See above.)



877-691  
for M5 screws  
(5/16" Hex.)

Inch


Pouce



Machine Screws - Security Hex Socket Drive

Vis mécaniques – prise hexagonale de sécurité

SECURITY HEX SOCKET  
BUTTON HEAD CAP SCREWS



Plain Finish  
**ALLOY STEEL**

| LENGTH   | 1/4"                                   | 3/8"    | 1/2"    | 5/8"    | 3/4"    | 1"      | 1-1/4"  | 1-1/2"   | 1-3/4"  | 2"      |
|----------|--|---------|---------|---------|---------|---------|---------|----------|---------|---------|
| DIA.     | ORDER BY SPAENAUR NUMBERS LISTED BELOW |         |         |         |         |         |         |          |         |         |
| 4-40     | ▲381-M35-1X                            | 381-212 | 381-213 |         | 381-214 | 381-215 |         |          |         |         |
| 6-32     | 381-216                                | 381-217 | 381-218 |         | 381-220 | 381-221 |         | 381-222  |         |         |
| 8-32     | 381-223                                | 381-224 | 381-225 | 381-226 | 381-227 | 381-228 | 381-229 | 381-230  |         |         |
| 10-24    | 381-231                                | 381-232 | 381-233 | 381-234 | 381-235 | 381-236 | 381-237 | 381-238  |         |         |
| 10-32    | 381-239                                | 381-240 | 381-241 | 381-242 | 381-243 | 381-244 | 381-245 | 381-246  |         |         |
| 1/4"-20  | 381-247                                | 381-248 | 381-249 | 381-250 | 381-251 | 381-252 | 381-253 | ◆381-254 | 381-255 | 381-256 |
| 5/16"-18 |  |         | 381-257 |         | 381-258 | 381-259 |         | 381-260  |         |         |
| 3/8"-16  |  |         | 381-261 |         | 381-262 | 381-263 | 381-264 | 381-265  |         | 381-266 |

▲381-177ZP Zinc Plated

◆381-254ZP Zinc Plated

**18-8 STAINLESS STEEL**

Head/Body & Socket Dimensions to ANSI/ASME B 18.3

|          |         |   |         |         |         |         |         |         |  |         |
|----------|---------|---|---------|---------|---------|---------|---------|---------|--|---------|
| 4-40     | 381-759 | 381-760                                     | 381-761 |         | 381-762 | 381-763 |         |         |  |         |
| 6-32     | 381-350 | 381-351                                     | 381-352 | 381-764 | 381-353 | 381-354 |         | 381-765 |  |         |
| 8-32     | 381-766 | *381-355                                    | 381-356 | 381-767 | 381-357 | 381-358 | 381-768 | 381-359 |  |         |
| 10-24    | 381-368 | 381-369                                     | 381-370 | 381-769 | 381-371 | 381-372 | 381-770 | 381-373 |  | 381-374 |
| 10-32    | 381-360 | 381-361                                     | 381-362 | 381-773 | 381-363 | 381-364 | 381-365 | 381-366 |  | 381-367 |
| 1/4"-20  | 381-771 | 381-772                                     | 381-375 | 381-376 | 381-377 | 381-378 | 381-379 | 381-380 |  | 381-381 |
| 1/4"-28  |         |   | 381-382 |         |         | 381-383 |         |         |  |         |
| 5/16"-18 |         | *381-199 Use with 1/8" A/F Security Driver. | 381-384 |         | 381-385 | 381-386 | 381-387 | 381-388 |  | 381-389 |
| 3/8"-16  |         |   | 381-390 |         | 381-391 | 381-392 |         | 381-393 |  |         |

SECURITY HEX SOCKET  
FLAT HEAD CAP SCREWS



82°  
Ctsk. Hd.

Plain Finish  
**ALLOY STEEL**

| LENGTH   | 1/4"                                   | 3/8"    | 1/2"    | 5/8"    | 3/4"    | 1"       | 1-1/4"  | 1-1/2"  | 1-3/4"  | 2"      |
|----------|--|---------|---------|---------|---------|----------|---------|---------|---------|---------|
| DIA.     | ORDER BY SPAENAUR NUMBERS LISTED BELOW |         |         |         |         |          |         |         |         |         |
| 4-40     |  | 381-267 | 381-268 |         | 381-269 | 381-270  |         |         |         |         |
| 6-32     | 381-271                                | 381-272 | 381-273 | 381-274 | 381-275 | 381-276  |         | 381-277 |         |         |
| 8-32     | 381-278                                | 381-279 | 381-280 | 381-281 | 381-282 | 381-283  | 381-284 | 381-285 |         |         |
| 10-24    |  | 381-287 | 381-288 | 381-289 | 381-290 | 381-291  | 381-292 | 381-293 |         |         |
| 10-32    |  | 381-295 | 381-296 | 381-297 | 381-298 | ■381-299 | 381-154 | 381-155 |         |         |
| 1/4"-20  |  | 381-157 | 381-158 | 381-159 | 381-160 | 381-161  | 381-162 | 381-163 | 381-164 | 381-165 |
| 5/16"-18 |  |         | 381-166 |         | 381-167 | 381-168  |         | 381-169 |         |         |
| 3/8"-16  |  |         | 381-170 |         | 381-171 | 381-172  | 381-173 | 381-174 |         | 381-175 |

**18-8 STAINLESS STEEL**

■381-299ZP Zinc Plated

|          |         |         |         |         |         |         |         |         |  |         |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|--|---------|
| 6-32     | 381-774 | 381-394 |         | 381-775 | 381-396 | 381-776 |         | 381-777 |  |         |
| 8-32     | 381-778 | 381-397 | 381-398 | 381-779 | 381-399 | 381-400 | 381-780 | 381-781 |  |         |
| 10-24    |         | 381-405 | 381-406 | 381-783 | 381-407 | 381-408 | 381-784 | 381-785 |  |         |
| 10-32    |         | 381-787 | 381-401 | 381-788 | 381-402 | 381-403 | 381-789 | 381-404 |  |         |
| 12-24    |         |         | 381-409 |         |         |         |         |         |  |         |
| 1/4"-20  |         | 381-791 | 381-410 | 381-792 | 381-411 | 381-412 | 381-413 | 381-414 |  | 381-793 |
| 5/16"-18 |         |         | 381-415 |         | 381-416 | 381-417 | 381-794 | 381-418 |  |         |
| 3/8"-16  |         |         |         |         | 381-419 | 381-420 | 381-421 | 381-422 |  |         |

Continues on pages B108 and B109

PKG QTY. #6 to 1/4" Dia. - 100  
PKG QTY. 5/16" and 3/8" Dia. - 50

**Machine Screws - Security Phillips Drive / Bits / Screwdrivers**



Vis mécaniques – prise de sécurité cruciforme / embouts / tournevis

Inch  
Pouce

**SECURITY PHILLIPS DRIVE  
PAN HEAD  
MACHINE SCREWS**

**18-8  
STAINLESS  
STEEL**

| DIA. THREAD | 10 24 UNC                              | 10 32 UNF | 12 24 UNC | 1/4 20 UNC |
|-------------|--|-----------|-----------|------------|
| DRIVER SIZE | P2                                     | P2        | P3        | P3         |
| LENGTH      | ORDER BY SPAENAUR NUMBERS LISTED BELOW |           |           |            |
| 1/2"        | 381-446                                | 381-440   | 381-452   | 381-456    |
| 3/4"        | 381-447                                | 381-441   | 381-453   | 381-457    |
| 1"          | 381-448                                | 381-442   | 381-454   | 381-458    |
| 1-1/4"      | 381-449                                | 381-443   |           | 381-459    |
| 1-1/2"      | 381-450                                | 381-444   | 381-455   | 381-460    |
| 2"          | 381-451                                | 381-445   |           | 381-461    |



PKG QTY. 100

**SECURITY PHILLIPS DRIVE  
FLAT HEAD  
MACHINE SCREWS**

**18-8  
STAINLESS  
STEEL**

|        |         |         |         |         |
|--------|---------|---------|---------|---------|
| 1/2"   | 381-483 | 381-477 | 381-489 | 381-493 |
| 3/4"   | 381-484 | 381-478 | 381-490 | 381-494 |
| 1"     | 381-485 | 381-479 | 381-491 | 381-495 |
| 1-1/4" | 381-486 | 381-480 |         | 381-496 |
| 1-1/2" | 381-487 | 381-481 | 381-492 | 381-497 |
| 2"     | 381-488 | 381-482 |         | 381-498 |




PKG QTY. 100

**PHILLIPS SECURITY BIT**

SPAENAUR No.  
**876-773**

Phillips #2  
Pin-Head Bits  
fit sizes #6 to #10  
screws.



1/4"  
Hex

PKG QTY. 1

SPAENAUR No.  
**876-1573**

Phillips #3  
Pin-Head Bits  
fit sizes #12 to 1/4"  
screws.

For MAGNETIC DRIVERS - Solid and Hollow Handle  
See page P17.



**PHILLIPS SECURITY  
SCREW DRIVER**



O/A Length 8"

Plastic Handle

SPAENAUR  
No.  
**876-851**

Screw Driver fits #6 to #10 Dia.  
Phillips Drive Security Screws.

PKG QTY. 1



Inch


Pouce



Security Sheet Metal Screws / Bits / Hex Keys

Vis à tôle de sécurité / Embouts / Clés hexagonales

SECURITY HEX SOCKET  
BUTTON HEAD, Type A or AB (our option)  
SHEET METAL SCREWS




**STEEL**  
Case-Hardened  
Zinc Plated

| LENGTH      | 3/8"                                   | 1/2"    | 5/8"    | 3/4"    | 1"      | 1-1/4"  | 1-1/2"  | 2"      | TOOLS   |            |
|-------------|--|---------|---------|---------|---------|---------|---------|---------|---------|------------|
|             | ORDER BY SPAENAUR NUMBERS LISTED BELOW |         |         |         |         |         |         |         |         | BIT        |
| DIA.        |  |         |         |         |         |         |         |         |         |            |
| 6 (3.5 mm)  | 516-050                                | 516-051 | 516-052 | 516-053 | 516-054 |         | 516-055 |         | 876-769 | 130-093    |
| 8 (4.2 mm)  | 516-056                                | 516-057 | 516-058 | 516-059 | 516-060 | 516-061 | 516-062 | 516-063 | 876-770 | 130-T03-1C |
| 10 (4.8 mm) |  | 516-064 | 516-065 | 516-066 | 516-067 | 516-068 | 516-069 | 516-070 | 876-770 | 130-T03-1C |
| 14 (6.3 mm) |  | 516-071 | 516-072 | 516-073 | 516-074 | 516-075 | 516-076 | 516-077 | 876-770 | 130-T03-1C |

**18-8 STAINLESS STEEL**

|             |         |         |         |         |         |         |         |         |         |            |
|-------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------------|
| 6 (3.5 mm)  | 516-748 | 516-749 | 516-750 | 516-751 | 516-752 |         | 516-753 |         | 876-769 | 130-093    |
| 8 (4.2 mm)  | 516-754 | 516-755 | 516-756 | 516-757 | 516-758 | 516-759 | 516-760 | 516-761 | 876-770 | 130-T03-1C |
| 10 (4.8 mm) |         | 516-762 | 516-763 | 516-764 | 516-765 | 516-766 | 516-767 | 516-768 | 876-770 | 130-T03-1C |
| 14 (6.3 mm) |         | 516-769 |         | 516-770 | 516-771 | 516-772 | 516-773 | 516-774 | 876-770 | 130-T03-1C |

SECURITY HEX SOCKET  
FLAT HEAD, Type A or AB (our option)  
SHEET METAL SCREWS



**STEEL**  
Case-Hardened  
Zinc Plated

| LENGTH      | 3/8"                                   | 1/2"    | 5/8"    | 3/4"    | 1"      | 1-1/4"  | 1-1/2"  | 2"      | TOOLS   |            |
|-------------|--|---------|---------|---------|---------|---------|---------|---------|---------|------------|
|             | ORDER BY SPAENAUR NUMBERS LISTED BELOW |         |         |         |         |         |         |         |         | BIT        |
| DIA.        |  |         |         |         |         |         |         |         |         |            |
| 6 (3.5 mm)  | 516-078                                | 516-079 | 516-080 | 516-081 | 516-082 |         | 516-083 |         | 876-769 | 130-093    |
| 8 (4.2 mm)  |  | 516-084 | 516-085 | 516-086 | 516-087 | 516-088 | 516-089 | 516-090 | 876-770 | 130-T03-1C |
| 10 (4.8 mm) |  | 516-091 | 516-092 | 516-093 | 516-094 | 516-095 | 516-096 | 516-097 | 876-770 | 130-T03-1C |
| 14 (6.3 mm) |  |         | 516-098 | 516-099 | 516-100 | 516-101 | 516-102 | 516-103 | 876-770 | 130-T03-1C |

**18-8 STAINLESS STEEL**

|             |         |         |         |         |         |         |         |         |         |            |
|-------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------------|
| 6 (3.5 mm)  | 516-775 | 516-776 | 516-777 | 516-778 | 516-779 |         | 516-780 |         | 876-769 | 130-093    |
| 8 (4.2 mm)  |         | 516-781 | 516-782 | 516-783 | 516-784 | 516-785 | 516-786 | 516-787 | 876-770 | 130-T03-1C |
| 10 (4.8 mm) |         | 516-788 | 516-789 | 516-790 | 516-791 | 516-792 | 516-793 | 516-794 | 876-770 | 130-T03-1C |
| 14 (6.3 mm) |         |         |         | 516-795 | 516-796 | 516-797 | 516-798 | 516-799 | 876-770 | 130-T03-1C |


SECURITY BITS & TOOLS ARE NOT GUARANTEED AGAINST OVERTORQUE, BREAKAGE OR WEAR.

**HEX SOCKET SECURITY BITS**



| SPAENAUR No. | ACROSS FLATS | FITS BUTTON HEAD       | FITS FLAT HEAD         |
|--------------|--------------|------------------------|------------------------|
| 876-835      | 3/32"        | #4                     | #4                     |
| 876-769      | 1/8"         | #6                     | #6                     |
| 876-770      | 5/32"        | #8, #10, #14, and 1/4" | #8, #10, #14, and 1/4" |
| 876-771      | 3/16"        | 5/16"                  | 5/16"                  |
| 876-772      | 7/32"        | 3/8"                   | 3/8"                   |

1/4" Hex

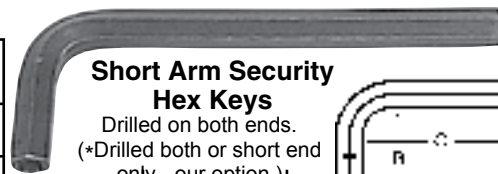

**Short Arm Security Hex Keys**

Drilled on both ends.  
(\*Drilled both or short end only - our option.)

Alloy Steel

| SPAENAUR No. | *NOM. KEY SIZE OR ACROSS FLATS | W WIDTH ACROSS FLATS Max. | B LENGTH OF SHORT ARM Max. | C LENGTH OF LONG ARM Max. | HOLE SIZE +.005 |
|--------------|--------------------------------|---------------------------|----------------------------|---------------------------|-----------------|
| 130-100      | 3/32" (0.094)"                 | 0.0937"                   | 0.750"                     | 2.094"                    | .050"           |
| 130-093      | 1/8" (0.125)"                  | 0.1250"                   | 0.844"                     | 2.344"                    | .075"           |
| 130-094      | 9/64" (0.141)"                 | 0.1406"                   | 0.891"                     | 2.469"                    | .084"           |
| 130-T03-1C   | 5/32" (0.156)"                 | 0.1562"                   | 0.938"                     | 2.594"                    | .097"           |
| 130-096      | 3/16" (0.188)"                 | 0.1875"                   | 1.031"                     | 2.844"                    | .102"           |
| 130-097      | 7/32" (0.219)"                 | 0.2187"                   | 1.125"                     | 3.094"                    | .123"           |
| *130-098     | 1/4" (0.250)"                  | 0.2500"                   | 1.219"                     | 3.344"                    | .123"           |
| *130-099     | 5/16" (0.312)"                 | 0.3125"                   | 1.344"                     | 3.844"                    | .201"           |

Please refer to above chart when selecting security Hex Keys by Screw Diameter(s).

For MAGNETIC DRIVERS - Solid Handle  
See page P17.

CATALOG 14

SPAENAUR

All Security Bits PKG QTY. 1  
All screws this page PKG QTY. 100

Sheet Metal Screws - Security Phillips Drive

Vis à tôle – tête de sécurité cruciforme



Inch  
Pouce

B

SECURITY PHILLIPS DRIVE  
PAN HEAD  
SHEET METAL SCREWS  
TYPE A or AB (our option)



18-8  
STAINLESS  
STEEL

| DIA.        | #10                                    | #12        | #14      |
|-------------|--|------------|----------|
| DRIVER SIZE | P2                                     | P3         | P3       |
| LENGTH      | ORDER BY SPAENAUR NUMBERS LISTED BELOW |            |          |
| 1/2"        | 516-977                                | 516-986    | 516-994  |
| 3/4"        | 516-978                                | 516-987    | 516-995  |
| 1"          | 516-979                                | 516-988    | 516-996  |
| 1-1/4"      | 516-980                                | 516-989    | 516-997  |
| 1-1/2"      | 516-981                                | 516-990    | 516-998  |
| 2"          | 516-982                                | 516-991    | 516-999  |
| 2-1/2"      | 516-983                                | 516-992    | 516-1000 |
| 3"          | 516-984                                | 516-C42-1C | 516-1001 |
| 3-1/2"      | 516-985                                |            |          |

SECURITY PHILLIPS DRIVE  
FLAT HEAD  
SHEET METAL SCREWS  
TYPE A or AB (our option)



18-8  
STAINLESS  
STEEL

| DIA.        | #10                                    | #12      | #14      |
|-------------|--|----------|----------|
| DRIVER SIZE | P2                                     | P3       | P3       |
| LENGTH      | ORDER BY SPAENAUR NUMBERS LISTED BELOW |          |          |
| 1/2"        | 516-1017                               | 516-1025 |          |
| 3/4"        | 516-1018                               | 516-1026 | 516-1034 |
| 1"          | 516-1019                               | 516-1027 | 516-1035 |
| 1-1/4"      | 516-1020                               | 516-1028 | 516-1036 |
| 1-1/2"      | 516-1021                               | 516-1029 | 516-1037 |
| 2"          | 516-1022                               | 516-1030 | 516-1038 |
| 2-1/2"      | 516-1023                               | 516-1031 | 516-1039 |
| 3"          | 516-1024                               | 516-1032 | 516-1040 |

ALL SCREWS ON THIS PAGE - PKG QTY. 50

Inch

Pouce



Machine Screws - Tamper-Resistant Torx® Drive

Vis mécaniques à prise Torx<sup>MD</sup> inviolables

TORX® TAMPER-RESISTANT  
BUTTON HEAD MACHINE SCREWS



Plain Finish

ALLOY STEEL

| LENGTH  | 3/8"                                   | 1/2"    | 5/8" | 3/4"    | 1"      | 1-1/4"  | 1-1/2"  | Torx<br>Recess<br>Size |
|---------|--|---------|------|---------|---------|---------|---------|------------------------|
| DIA.    | ORDER BY SPAENAUR NUMBERS LISTED BELOW |         |      |         |         |         |         |                        |
| 6-32    | 381-600                                | 381-601 |      | 381-602 | 381-603 |         | 381-604 | TR10                   |
| 8-32    | 381-605                                | 381-606 |      | 381-607 | 381-608 | 381-609 | 381-610 | TR15                   |
| 10-24   |  | 381-611 |      | 381-612 | 381-613 | 381-614 | 381-615 | TR25                   |
| 10-32   |  | 381-616 |      | 381-617 | 381-618 | 381-619 | 381-620 | TR25                   |
| 1/4"-20 | 381-621                                | 381-622 |      | 381-623 | 381-624 | 381-625 | 381-626 | TR27                   |

18-8 STAINLESS STEEL

|         |         |         |         |         |            |         |         |      |
|---------|---------|---------|---------|---------|------------|---------|---------|------|
| 6-32    | 381-654 | 381-655 |         | 381-656 | 381-657    |         | 381-658 | TR10 |
| 8-32    | 381-659 | 381-660 |         | 381-661 | 381-G04-1N | 381-663 | 381-664 | TR15 |
| 10-24   | 381-665 | 381-666 |         | 381-667 | 381-668    | 381-669 | 381-670 | TR25 |
| 10-32   | 381-671 | 381-672 |         | 381-673 | 381-674    | 381-675 | 381-676 | TR25 |
| 1/4"-20 | 381-677 | 381-678 | 381-679 | 381-680 | 381-681    | 381-682 | 381-683 | TR27 |

TORX® TAMPER-RESISTANT  
FLAT HEAD MACHINE SCREWS



Plain Finish

ALLOY STEEL

| LENGTH  | 3/8"                                   | 1/2"     | 5/8"    | 3/4"    | 1"      | 1-1/4"  | 1-1/2"  | Torx<br>Recess<br>Size |
|---------|--|----------|---------|---------|---------|---------|---------|------------------------|
| DIA.    | ORDER BY SPAENAUR NUMBERS LISTED BELOW |          |         |         |         |         |         |                        |
| 6-32    | 381-627                                | 381-628  |         | 381-629 | 381-630 |         | 381-631 | TR15                   |
| 8-32    | 381-632                                | 381-633  |         | 381-634 | 381-635 | 381-636 | 381-637 | TR20                   |
| 10-24   |  | 381-638  |         | 381-639 | 381-640 | 381-641 | 381-642 | TR25                   |
| 10-32   |  | 381-643  |         | 381-644 | 381-645 | 381-646 | 381-647 | TR25                   |
| 1/4"-20 | *381-648                               | *381-649 | 381-599 | 381-650 | 381-651 | 381-652 | 381-653 | TR30                   |

\*Undercut Head - TR27 Drive

18-8 STAINLESS STEEL

|         |           |           |         |         |          |         |         |      |
|---------|-----------|-----------|---------|---------|----------|---------|---------|------|
| 6-32    | 381-684   | 381-685   |         | 381-686 | 381-687  |         | 381-688 | TR15 |
| 8-32    | 381-689   | 381-690   |         | 381-691 | 381-692  | 381-693 | 381-694 | TR20 |
| 10-24   | 381-695   | 381-696   |         | 381-697 | ●381-698 | 381-699 | 381-700 | TR25 |
| 10-32   | 381-701   | 381-702   |         | 381-703 | 381-704  | 381-705 | 381-706 | TR25 |
| 12-24   |           | ▲ 381-707 |         | 381-708 | 381-709  |         |         | TR25 |
| 1/4"-20 | ■ 381-710 | ■ 381-711 |         |         |          |         |         | TR27 |
| 1/4"-20 | 381-718   |           | 381-712 | 381-713 | 381-714  | 381-715 | 381-716 | TR30 |

▲ Undercut Head - TR20 Drive

● 381-717 TR20 Drive

■ Undercut Head

All Screws on This Page - PKG QTY. 100

For Torx® Tamper-Resistant Bits and Drivers  
See page B115.



Sheet Metal Screws - Security Torx® Drive

Vis à tôle – tête de sécurité Torx<sup>MD</sup>



Inch  
Pouce

**TORX® TAMPER-RESISTANT  
BUTTON HEAD, Type A or AB (our option)  
SHEET METAL SCREWS**



**STEEL**  
Plain Finish  
C-1018/C-1022  
**Case-Hardened**  
PKG QTY. 100

| LENGTH      | 1/2"                                   | 5/8" | 3/4"    | 1"      | 1-1/4"  | 1-1/2"  | Torx Recess Size |
|-------------|--|------|---------|---------|---------|---------|------------------|
| DIA.        | ORDER BY SPAENAUR NUMBERS LISTED BELOW |      |         |         |         |         |                  |
| 6 (3.5 mm)  | 516-200                                |      | 516-201 | 516-202 |         | 516-203 | TR10             |
| 8 (4.2 mm)  | 516-204                                |      | 516-205 | 516-206 | 516-207 | 516-208 | TR15             |
| 10 (4.8 mm) | 516-209                                |      | 516-210 | 516-211 | 516-212 | 516-213 | TR25             |
| 14 (6.3 mm) | 516-214                                |      | 516-215 | 516-216 | 516-217 | 516-218 | TR27             |

**18-8 STAINLESS STEEL**

|             |         |  |         |         |         |         |      |
|-------------|---------|--|---------|---------|---------|---------|------|
| 6 (3.5 mm)  | 516-921 |  | 516-922 | 516-923 |         | 516-924 | TR10 |
| 8 (4.2 mm)  | 516-925 |  | 516-926 | 516-927 | 516-928 | 516-929 | TR15 |
| 10 (4.8 mm) | 516-930 |  | 516-931 | 516-932 | 516-933 | 516-934 | TR25 |
| 14 (6.3 mm) | 516-935 |  | 516-936 | 516-937 | 516-938 | 516-939 | TR27 |

**TORX® TAMPER-RESISTANT  
FLAT HEAD, Type A or AB (our option)  
SHEET METAL SCREWS**



82°  
Ctsk. Hd.

**STEEL**  
Plain Finish  
C-1018/C-1022  
**Case-Hardened**  
PKG QTY. 100

| LENGTH      | 1/2"                                   | 5/8" | 3/4"    | 1"      | 1-1/4"  | 1-1/2"  | Torx Recess Size |
|-------------|--|------|---------|---------|---------|---------|------------------|
| DIA.        | ORDER BY SPAENAUR NUMBERS LISTED BELOW |      |         |         |         |         |                  |
| 6 (3.5 mm)  |  |      |         | 516-221 |         |         | TR10             |
| 6 (3.5 mm)  | 516-026                                |      | 516-220 |         |         | 516-222 | TR15             |
| 8 (4.2 mm)  | 516-237                                |      | 516-239 | 516-240 | 516-238 | 516-242 | TR20             |
| 10 (4.8 mm) |  |      | 516-229 |         |         |         | TR20             |
| 10 (4.8 mm) | 516-228                                |      |         | 516-230 | 516-231 | 516-232 | TR25             |
| 14 (6.3 mm) |  |      | 516-233 | 516-234 | 516-235 | 516-236 | TR30             |

**18-8 STAINLESS STEEL**

|             |         |         |         |         |         |         |      |
|-------------|---------|---------|---------|---------|---------|---------|------|
| 6 (3.5 mm)  | 516-940 |         | 516-941 | 516-942 |         | 516-943 | TR15 |
| 8 (4.2 mm)  | 516-944 |         | 516-945 | 516-946 | 516-947 | 516-948 | TR20 |
| 10 (4.8 mm) | 516-949 |         | 516-950 | 516-951 | 516-952 | 516-953 | TR25 |
| 14 (6.3 mm) |         | 516-954 | 516-955 | 516-956 | 516-957 | 516-958 | TR30 |

**Torx® Pan Head, Tamper-Resistant  
Self-Drilling, Tapping Screw**

SPAENAUR No.  
**516-199**

#8 x 3/4" long



#2 Point Style

**410 Stainless Steel-Hardened**

(Use TR20 Torx Bit)

PKG QTY. 100

For additional Torx Tamper-Resistant items  
see pages B111, B113 - B115.

Inch

Pouce



Sheet Metal Screws - Tamper-Resistant Assortments

Assortiments de vis à tôle inviolables

**TORX® TAMPER-RESISTANT SHEET METAL SCREWS**

**Alloy Steel**

**27 Items - 507 Pieces**


13-3/8" W x 9-1/4" D x 2" H

Furnished in a REGULAR SIZE grey enamelled steel drawer. Drawer will fit into Slide Racks shown on page A2

805-547A Shipping weights

**3.61 kg** (7.97 lbs.)

**3.64 kg** (8.04 lbs.)



**ASSORTMENT 805-548**

**Machine Screws**

| Spenaaur No.       | Size             | Qty. | Page        |
|--------------------|------------------|------|-------------|
| <b>Button Head</b> |                  |      |             |
| 381-600            | #6-32 x 3/8"     | 25   | B111        |
| 381-601            | #6-32 x 1/2"     |      |             |
| 381-602            | #6-32 x 3/4"     |      |             |
| 381-606            | #8-32 x 1/2"     |      |             |
| 381-608            | #8-32 x 1"       |      |             |
| 381-612            | #10-24 x 3/4"    |      |             |
| 381-613            | #10-24 x 1"      |      |             |
| 381-617            | #10-32 x 3/4"    |      |             |
| 381-618            | #10-32 x 1"      |      |             |
| 381-624            | 1/4"-20 x 1"     |      |             |
| 381-626            | 1/4"-20 x 1-1/2" |      |             |
| <b>Flat Head</b>   |                  |      |             |
| 381-627            | #6-32 x 3/8"     | 25   | B111        |
| 381-633            | #8-32 x 1/2"     |      |             |
| 381-634            | #8-32 x 3/4"     |      |             |
| 381-638            | #10-24 x 1/2"    |      |             |
| 381-639            | #10-24 x 3/4"    |      |             |
| 381-640            | #10-24 x 1"      |      |             |
| 381-645            | #10-32 x 1"      |      |             |
| 381-650            | 1/4"-20 x 3/4"   |      |             |
| 381-651            | 1/4"-20 x 1"     |      |             |
| <b>Insert Bits</b> |                  |      |             |
| 876-348            | TR10             | 1    | B113<br>P16 |
| 876-349            | TR15             |      |             |
| 876-823            | TR20             |      |             |
| 876-350            | TR25             |      |             |
| 876-351            | TR27             |      |             |
| 876-892            | TR30             |      |             |
| <b>Driver</b>      |                  |      |             |
| 876-124            | 1/4"             | 1    | P17         |

**ASSORTMENT 805-547A**

**Sheet Metal Screws**

| Spenaaur No.       | Size         | Qty. | Page        |
|--------------------|--------------|------|-------------|
| <b>Button Head</b> |              |      |             |
| 516-200            | #6 x 1/2"    | 25   | B112        |
| 516-202            | #6 x 1"      |      |             |
| 516-204            | #8 x 1/2"    |      |             |
| 516-206            | #8 x 1"      |      |             |
| 516-208            | #8 x 1-1/2"  |      |             |
| 516-209            | #10 x 1/2"   |      |             |
| 516-211            | #10 x 1"     |      |             |
| 516-213            | #10 x 1-1/2" |      |             |
| 516-216            | #14 x 1"     |      |             |
| 516-218            | #14 x 1-1/2" |      |             |
| <b>Flat Head</b>   |              |      |             |
| 516-026            | #6 x 1/2"    | 25   | B112        |
| 516-221            | #6 x 1"      |      |             |
| 516-237            | #8 x 1/2"    |      |             |
| 516-240            | #8 x 1"      |      |             |
| 516-242            | #8 x 1-1/2"  |      |             |
| 516-228            | #10 x 1/2"   |      |             |
| 516-230            | #10 x 1"     |      |             |
| 516-232            | #10 x 1-1/2" |      |             |
| 516-234            | #14 x 1"     |      |             |
| 516-236            | #14 x 1-1/2" |      |             |
| <b>Insert Bits</b> |              |      |             |
| 876-348            | TR10         | 1    | B115<br>P16 |
| 876-349            | TR15         |      |             |
| 876-823            | TR20         |      |             |
| 876-350            | TR25         |      |             |
| 876-351            | TR27         |      |             |
| 876-892            | TR30         |      |             |
| <b>Driver</b>      |              |      |             |
| 876-124            | 1/4"         | 1    | P17         |

**ASSORTMENT 805-543**

**TORX® TAMPER-RESISTANT SCREWS**


**18-8 Stainless Steel**

**27 SIZES - 507 PIECES**

Furnished in a REGULAR SIZE grey enamelled steel drawer. Drawer will fit into Slide Racks shown on page A2

13-3/8" W x 9-1/4" D x 2" H

Shipping Weight: **3.5 kg** (7-3/4 lbs.)



| Spenaaur No.       | Size         | Qty. | Page        |
|--------------------|--------------|------|-------------|
| <b>Button Head</b> |              |      |             |
| 516-921            | #6 x 1/2"    | 25   | B112        |
| 516-923            | #6 x 1"      |      |             |
| 516-925            | #8 x 1/2"    |      |             |
| 516-927            | #8 x 1"      |      |             |
| 516-929            | #8 x 1-1/2"  |      |             |
| 516-930            | #10 x 1/2"   |      |             |
| 516-932            | #10 x 1"     |      |             |
| 516-934            | #10 x 1-1/2" |      |             |
| 516-937            | #14 x 1"     |      |             |
| 516-939            | #14 x 1-1/2" |      |             |
| <b>Flat Head</b>   |              |      |             |
| 516-940            | #6 x 1/2"    | 25   | B112        |
| 516-942            | #6 x 1"      |      |             |
| 516-944            | #8 x 1/2"    |      |             |
| 516-946            | #8 x 1"      |      |             |
| 516-948            | #8 x 1-1/2"  |      |             |
| 516-949            | #10 x 1/2"   |      |             |
| 516-951            | #10 x 1"     |      |             |
| 516-953            | #10 x 1-1/2" |      |             |
| 516-956            | #14 x 1"     |      |             |
| 516-958            | #14 x 1-1/2" |      |             |
| <b>Insert Bits</b> |              |      |             |
| 876-348            | TR10         | 1    | B115<br>P16 |
| 876-349            | TR15         |      |             |
| 876-823            | TR20         |      |             |
| 876-350            | TR25         |      |             |
| 876-351            | TR27         |      |             |
| 876-892            | TR30         |      |             |
| <b>Driver</b>      |              |      |             |
| 876-124            | 1/4"         | 1    | P17         |

Machine Screws - Torx® Tamper-Resistant Drive

Vis mécaniques à prise Torx<sup>MD</sup> inviolables



Metric

Métrique

B

**Torx® Tamper-Resistant Button Head Machine Screws**



**A2 Stainless Steel**



|                  | M4                                     | M5         | M6         |
|------------------|--|------------|------------|
|                  | Pitch 0.70                             | Pitch 0.80 | Pitch 1.00 |
| Torx Recess Size | TR20                                   | TR25       | TR30       |
| Length mm        | ORDER BY SPAENAUR NUMBERS LISTED BELOW |            |            |
| 8                | 381-1057                               | 381-1066   |            |
| 10               | 381-1058                               | 381-1067   | 381-1076   |
| 12               | 381-1059                               | 381-1068   | 381-1077   |
| 16               | 381-1060                               | 381-1069   | 381-1078   |
| 20               | 381-1061                               | 381-1070   | 381-1079   |
| 25               | 381-1062                               | 381-1071   | 381-1080   |
| 30               | 381-1063                               | 381-1072   | 381-1081   |
| 40               | 381-1064                               | 381-1073   | 381-1082   |
| 50               | 381-1065                               | 381-1074   | 381-1083   |
| 60               |  | 381-1075   | 381-1084   |

**Torx® Tamper-Resistant Flat Head Machine Screws**



**A2 Stainless Steel**




90°  
Ctsk. Hd.

|    |          |            |          |
|----|----------|------------|----------|
| 8  | 381-1085 | 381-1094   |          |
| 10 | 381-1086 | 381-M40-1Y | 381-1105 |
| 12 | 381-1087 | 381-1096   | 381-1106 |
| 16 | 381-1088 | 381-1097   | 381-1107 |
| 20 | 381-1089 | 381-1098   | 381-1108 |
| 25 | 381-1090 | 381-1099   | 381-1109 |
| 30 | 381-1091 | 381-1100   | 381-1110 |
| 40 | 381-1092 | 381-1101   | 381-1111 |
| 50 | 381-1093 | 381-1102   | 381-1113 |
| 60 |          | 381-1103   | 381-1112 |
| 70 |          | 381-1104   |          |

**Security Hex Socket Button Head Machine Screws**



**A2 Stainless Steel**




|               | M4                                     | M5         | M6         | M8         | M10        |
|---------------|--|------------|------------|------------|------------|
|               | Pitch 0.70                             | Pitch 0.80 | Pitch 1.00 | Pitch 1.25 | Pitch 1.50 |
| Bit/Tool Size | 2.5 mm                                 | 3 mm       | 4 mm       | 5 mm       | 6 mm       |
| Length mm     | ORDER BY SPAENAUR NUMBERS LISTED BELOW |            |            |            |            |
| 8             | 381-G02-1Y                             |            |            |            |            |
| 10            | 381-1002                               | 381-M37-1P | 381-1015   |            |            |
| 12            | 381-1003                               | 381-1009   | 381-1016   | 381-1023   |            |
| 16            | 381-1004                               | 381-1010   | 381-M36-2A | 381-1024   |            |
| 20            | 381-1005                               | 381-1011   | 381-1018   | 381-1025   | 381-1030   |
| 25            | 381-1006                               | 381-1012   | 381-1019   | 381-1026   | 381-1031   |
| 30            | 381-1007                               | 381-1013   | 381-1020   | 381-1027   | 381-1032   |
| 40            |  | 381-1014   | 381-1021   | 381-1028   | 381-1033   |
| 50            |  |            | 381-1022   | 381-1029   | 381-1034   |

**Security Hex Socket Flat Head Machine Screws**



**A2 Stainless Steel**



90°  
Ctsk. Hd.

|    |          |          |          |
|----|----------|----------|----------|
| 8  | 381-1035 |          |          |
| 10 | 381-1036 | 381-1042 | 381-1049 |
| 12 | 381-1037 | 381-1043 | 381-1050 |
| 16 | 381-1038 | 381-1044 | 381-1051 |
| 20 | 381-1039 | 381-1045 | 381-1052 |
| 25 | 381-1040 | 381-1046 | 381-1053 |
| 30 | 381-1041 | 381-1047 | 381-1054 |
| 40 |          | 381-1048 | 381-1055 |
| 50 |          |          | 381-1056 |

B114

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog.  
 © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

PKG QTY. M4 to M8 - 50  
 PKG QTY. M10 - 25

CATALOG 14

SPAENAUR

Inch

Pouce



**Thread Cutting Torx® Tamper-Resistant Screws / Tools**

Vis autotaraudeuses taillant le filet inviolables Torx<sup>MD</sup> / Outils



**TORX TAMPER-RESISTANT**

**BUTTON HEAD**

**Type F**

**Case-Hardened  
STEEL  
Zinc Plated**

**THREAD-CUTTING  
SCREWS**

Also suitable for use as machine screws in pre-threaded holes.

| SPAENAUR No. | Type F Screw Size | Head Style                        | Torx Recess Size | PKG QTY. |
|--------------|-------------------|-----------------------------------|------------------|----------|
| 381-201      | 8-32 x 3/4"       | Button Head TORX Tamper-Resistant | TR15             | 100      |
| 381-202      | 8-32 x 1"         |                                   |                  | 100      |
| 381-207      | 10-24 x 5/8"      |                                   | TR25             | 100      |
| 381-G01-1P   | 10-24 x 1"        |                                   |                  | 100      |
| 381-204      | 10-32 x 1/2"      |                                   | TR27             | 100      |
| 381-205      | 10-32 x 3/4"      |                                   |                  | 100      |
| 381-209      | 1/4"-20 x 3/4"    |                                   | TR27             | 100      |
| 381-210      | 1/4"-20 x 1"      |                                   |                  | 100      |
| 381-211      | 1/4"-20 x 1-1/2"  |                                   |                  | 100      |

**B**

**TORX® TAMPER-RESISTANT BITS and DRIVERS for Recessed Tamper-Resistant Screws**

The tamper-resistant TORX drive has a post in the centre of its recess which requires a specially mated driver to remove the fastener. Unauthorized removal is prevented.

| Torx Recess Size  | SPAENAUR NUMBERS LISTED BELOW        |  |  |
|-------------------|--------------------------------------|--|--|
|                   | HAND DRIVER                          | *INSERT BIT                                    | KEY WRENCH                                 |
| Approx. O/A Lgth. | with integral Bit and plastic handle | 1/4" Hex - 1" long<br>▲5/16" Hex - 1-1/4" long | Short Arm drilled both ends<br>Alloy Steel |
| TR7               | 5-7/8" <b>876-F16-1C</b>             | —  | —  |
| TR8               | 5-7/8" <b>876-1705</b>               | <b>876-890</b>                                 |  |
| TR9               | 5-7/8" <b>876-F53-1Y</b>             | <b>876-891</b>                                 |  |
| TR10              | 5-7/8" <b>876-1707</b>               | <b>876-348</b>                                 |  |
| TR15              | 6-7/8" <b>876-345</b>                | <b>876-349</b>                                 |  |
| TR20              | 6-7/8" <b>876-1708</b>               | <b>876-823</b>                                 |  |
| TR25              | 7-3/4" <b>876-346</b>                | <b>876-350</b>                                 |  |
| TR27              | 8" <b>876-347</b>                    | <b>876-351</b>                                 |  |
| TR30              | 8-1/2" <b>876-1709</b>               | <b>876-892</b>                                 |  |
| TR40              | 8-1/2" <b>876-1710</b>               | <b>876-893</b>                                 |  |
| TR45              | 8-1/2" <b>876-1711</b>               | <b>▲876-1792</b>                               |  |
| TR50              | 8-1/2" —                             | <b>▲876-1793</b>                               |  |



See pages B111 and B112 for screws.

\*Not for use with power driver.



(Hollow handle for storing bits.)

(Bits not included.)

**NOTE:** SPANNER and TORX "Tamper Resistant" tools, are NOT guaranteed against overtorque, misuse, breakage or wear.

**ALL BITS and TOOLS  
PKG QTY.1**

| Spaenaur No.               | Magnetic Driver Handles            |
|----------------------------|------------------------------------|
| <b>876-129<br/>876-131</b> | for 1/4" hex bits shown in chart.  |
| <b>876-130</b>             | for 5/16" hex bits shown in chart. |

CATALOG 14

SPAENAUR