

Inch


**Tie Down Straps / Straps / S-Hooks**

Pouce

**Sangles de fixation / Sangles / Crochets en S**




SPAENAUR No.	Length of Strap hole to hole	Number and Size of Steel "S" Hooks		Overall Length with Hooks	Maximum Stretch Length with Hooks
825-144	2-1/2"	2 - 2-7/8"		7-1/2"	8"
825-145	4"	2 - 2-7/8"		9"	10"
825-146	9"	2 - 2-7/8"		14"	18"
825-147	9"	1 - 2-7/8"	1 - 4-1/2"	16"	20"
825-148	9"	2 - 4-1/2"		18"	22"
825-149	9"	1 - 4-1/2"	1 - 6-1/2"	20"	24"
825-150	15"	2 - 2-7/8"		20"	26"
825-151	15"	1 - 2-7/8"	1 - 4-1/2"	22"	28"
825-152	15"	2 - 4-1/2"		24"	30"
825-153	15"	1 - 4-1/2"	1 - 6-1/2"	26"	32"
825-154	15"	2 - 6-1/2"		28"	34"
825-155	21"	2 - 2-7/8"		25"	32"
825-156	21"	1 - 2-7/8"	1 - 4-1/2"	27"	34"
825-157	21"	2 - 4-1/2"		29"	36"
825-158	21"	1 - 4-1/2"	1 - 6-1/2"	31"	38"
825-159	21"	2 - 6-1/2"		33"	40"
825-162	24"	2 - 2-7/8"		29"	32"
825-160	31"	2 - 2-7/8"		36"	48"
825-161	31"	2 - 4-1/2"		40"	52"

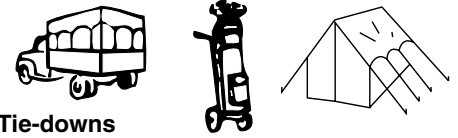

**Tie-downs**

- Live & Tough "EPDM".
- Min. tensile strength 1,000 lbs. psi.
- Heat and cold resistance. **-54° to +70°C** (-65° to +158°F)
- Ozone-proof.
- Resistant to oxidation, abrasion, sun and cold.

**S-HOOKS of Zinc Plated STEEL wire, .187" dia.**

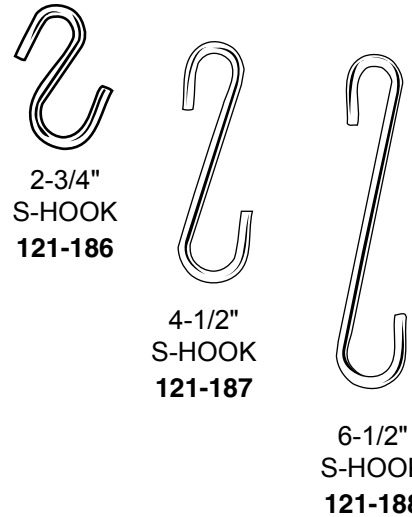

2-3/4" S-HOOK 121-186

4-1/2" S-HOOK 121-187

6-1/2" S-HOOK 121-188

**STRAPS ONLY without hooks**

SPAENAUR No.	Length	Overall Length
825-137	2-1/2"	4"
825-138	4"	5-3/4"
825-140	9"	10-1/2"
825-141	15"	16-3/4"
825-142	21"	22-1/2"
825-139	24"	25-1/2"
825-143	29"	30-1/2"

ALL STRAPS ARE APPROX. 11/16" WIDE BY 5/16" THICK

PKG QTY. 1

Adjustable



Plenty of S-t-r-e-t-c-h!

HOOKS PKG QTY. 100

See Grommets & Installation Tools beginning on Page M29

**SHEET BRASS GROMMETS WITH WASHERS**



**ROLLED RIM BRASS GROMMETS WITH SPUR WASHERS**



**BRASS VENTILATOR GROMMETS (WITH STEEL WASHERS)**

