

Inch

Split Pin Cotter Pins / R-Clips


Pouce

Goupilles fendues / Goupilles en R



## WEDGE-FAST COTTERS

LOW CARBON STEEL  
Plain Finish

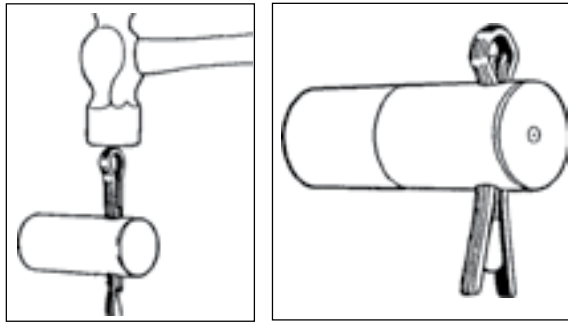

Length of Cotter pin is measured from under the head to the end of legs.


### Use WEDGE-FAST COTTERS

- where a positive lock is required to meet safety regulations.
- where vibration may cause wear over a period of time.
- where continued hard use can be expected as on heavy industrial machinery, farm implements, off-the-road construction equipment, mining equipment, railroad rolling stock, etc.
- where equipment may be exposed to vandalism.

SPAENAUR No.	SIZE DIA. x LENGTH	HOLE SIZE	RECOMMENDED SHAFT DIAMETER		PKG QTY.
			MIN.	MAX.	
091-001	5/16" x 2"	3/8"	3/4"	1"	100
091-002	5/16" x 2-1/2"	3/8"	1"	1-1/4"	100
091-003	5/16" x 3"	3/8"	1-5/16"	1-1/2"	100
091-004	5/16" x 3-1/2"	3/8"	1-5/16"	1-1/2"	100
091-005	3/8" x 2-1/2"	7/16"	1"	1-1/4"	100
091-006	3/8" x 3"	7/16"	1-5/16"	1-1/2"	100
091-007	3/8" x 3-1/2"	7/16"	1-5/16"	1-1/2"	100

### Right-angle Grip HITCH PIN CLIP


SPAENAUR No. 090-103

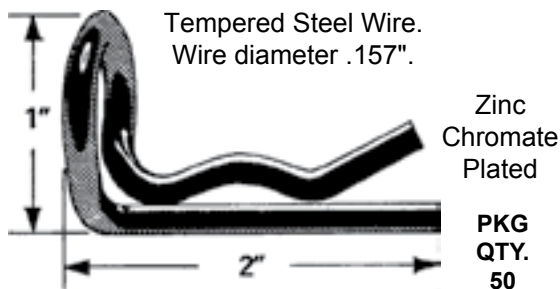

Used in construction work for securing concrete forms. Also many other applications.

### CLINCH PINS

For agricultural implements and heavy equipment. A quick hitch for tow bar and other applications.

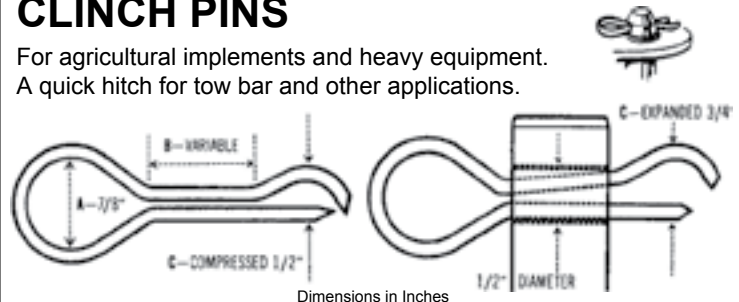

SPAENAUR No.	Metal	Wire Dia.	B Shank Length	Length O.A.	For Hole Dia.	PKG QTY.
090-102	Steel	5/16	1-1/4	3-7/16	3/8 to 7/16	10
CP-101	Steel, Zinc Plated	3/8	1-1/4	3-1/2	1/2 to 5/8	10
CP-99	Steel, Zinc Plated	3/8	1-1/2	3-1/2	1/2 to 5/8	10
092-001	Brass	5/32	9/16	1-1/8	3/16 to 5/16	100

CATALOG 14

SPAENAUR