

Crimpers / Wire Strippers / Cutters & Terminal Assortment

Inch

Sertisseuses / dénudeuses / pinces coupantes et assortiment de bornes


Pouce



PKG QTY. 1

**876-F18-1T
SOLDERLESS TERMINAL CRIMPER**

Ideal for use on non-insulated solderless terminals. Special crimping dies designed to provide strong, secure bond between terminal and wire. Stripping dies will handle 22 to 10 gauge cable easily, without nicking wire. Bolt cutting dies handle five popular-sized bolts - 4-40, 6-32, 8-32, 10-24 and 10-32. Black oxide finish with deep etched markings. Jumbo cushion grip handles for added comfort - puts more power into the squeeze.

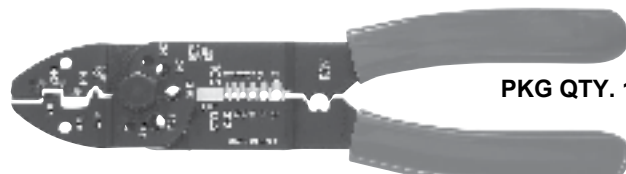

PKG QTY. 1

**876-1836
ALL PURPOSE ELECTRICIAN'S TOOL**


Has two wire cutters, cuts and strips 8 to 18 AWG solid wire or 10 to 22 AWG stranded wire, crimps insulated and non-insulated terminals, lugs and splices.

WIRE STRIPPER AND CUTTER

Strips six standard wire sizes without nicking wire: No. 10 through 20 AWG (.26 through .8 mm) Scissors action of 1/2" wide cutter makes clean cuts with little effort. Serrated nose jaws to bend, shape, or pull wire; holes for looping wire ends. Compact; only 6" long. Coil-spring opening action reduces fatigue. Comfortable, plastic covered handles.

876-1794

Multi-Purpose

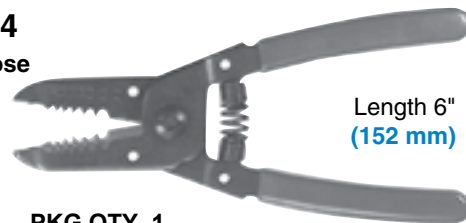

Length 6"
(152 mm)

PKG QTY. 1

**876-528
ELECTRICIANS' SCISSORS**

Full length 5"
Length of cut 1-7/8"

Hot drop-forged. Fully nickel plated. Commercial finish. Double stripping notch for 19 gauge (.035) and 23 gauge (.022) wire. Scraper and file on back edge of blade.



PKG QTY. 1


**ASSORTMENT
ASSORTIMENT A-215**

**Plastic Insulated
SOLDERLESS
TERMINALS**

**21 SIZES - 541 PIECES
Plus one (876-1836) Crimping Tool.**

REGULAR SIZE welded STEEL Drawer has hinged lid, "scooped" bins and is finished in Grey enamel. Drawer will fit into Slide Racks shown on page A2

Shipping Wt. 2.95 kg (6-1/2 lbs.)



Name	Insulation Length	Insulation Colour	Compatible Wire Size	Spenaaur No.	Compatible Screw/Stud Size	Outside Width	Overall Length	Qty.	Page
Ring -Tongue Terminals Insulated	7/16"	Yellow	12 AWG - 10 AWG	622-B08-1T	#10	3/8"	59/64"	25	G39
				WT-97	#12 - 1/4"	33/64"	1-11/64"		
				WT-98	3/8"	19/32"	1-9/32"		
		Blue	16 AWG - 14 AWG	WT-91	#5 - #6	15/64"	3/4"	30	
				WT-92	#10	21/64"	55/64"		
				WT-93	#12 - 1/4"	15/32"	1-7/64"		
	Red	22 AWG - 16 AWG	WT-94	#5 - #6	7/32"	25/32"	30		
			WT-89	#12 - 1/4"	15/32"	1-7/64"			
			WT-90	3/8"	17/32"	1-1/4"			
	22 AWG - 18 AWG	WT-87	#5 - #6	9/32"	27/32"	30			
		WT-88	#10	21/64"	55/64"				
		WT-103	#10	3/8"	1"				
Fork -Tongue Terminals	1/2"	Yellow	12 AWG - 10 AWG	WT-103	#10	3/8"	1"	25	
		Blue	16 AWG - 14 AWG	622-B07-1N	#4 - #6	19/64"	29/32"	30	
		Red	22 AWG - 18 AWG	WT-100	#10	23/64"	31/32"	25	
Insulated Solderless Butt Connector		Yellow	12 AWG - 10 AWG	WT-85	#5 - #6	5/16"	1"	25	G41
		Blue	16 AWG - 14 AWG	WT-84					
		Red	22 AWG - 18 AWG	WT-83					
All Purpose Electrician's Tool			18 ga. - 8 ga.	876-1836				1	G44

Inch

Heat Guns & Torches / Crimp 'N Seal® Connectors

Pouce

Pistolets chauffants et chalumeaux / connecteurs Crimp 'N Seal®



Electric Heat Gun

115 VOLTS AC

Two temperature settings 750°F & 1100°F. Cool down time not required. Fold down stand for hands free operation.

SPAENAUR No. 876-194

PKG QTY. 1



Overall Height 5-3/4"

Power Torch Portable Butane Heat Tool

PKG QTY. 1

Ideal for heat shrinkable connectors and tubing, soldering, and a variety of other applications. This versatile heat tool is fast and light weight, and will stand alone for hands-free operation. The self-igniting torch uses butane fuel, and is refillable. The tank capacity provides approximately 70 minutes of continuous usage.

SPAENAUR No. 876-F51-1A



Heat Shrink Tubing



Heat Shrink Connectors



Soldering

(Butane not included.)




Crimp 'N Seal®

Waterproof HEAT SHRINK Connectors

Crimp 'N Seal® waterproof connectors provide an environmental seal and offer superior strain relief. When heat is applied, the tough polymer jacket shrinks while simultaneously activating the adhesive inside the tubing to completely encapsulate the connection.


Easy Installation steps:



1. STRIP




2. CRIMP



3. HEAT

Crimp 'N Seal® Waterproof HEAT SHRINK Connector Rings



SPAENAUR No.	Wire Range	Stud Size	"B"	"W"	"L"	Max. Wire Insulation	PKG QTY.
622-001	22-18	6	.250"	.25"	1.06"	.170"	10
622-002	22-18	10	.250"	.31"	1.08"	.170"	10
622-003	16-14	6	.250"	.31"	1.00"	.190"	10
622-004	16-14	8	.250"	.31"	1.03"	.190"	10
622-005	16-14	10	.250"	.31"	1.03"	.190"	10
622-006	16-14	1/4"	.250"	.46"	1.27"	.190"	10
622-007	16-14	5/16"	.250"	.46"	1.27"	.190"	10
622-008	16-14	3/8"	.250"	.53"	1.30"	.190"	10
622-009	12-10	8	.250"	.37"	1.22"	.240"	10
622-010	12-10	10	.250"	.37"	1.20"	.240"	10
622-011	12-10	1/4"	.250"	.52"	1.41"	.240"	10
622-012	12-10	3/8"	.250"	.59"	1.47"	.240"	10
622-013	12-10	1/2"	.250"	.72"	1.54"	.240"	10

CATALOG 14

SPAENAUR