


Inch

Split Pin Cotter Pins / R-Clips


Pouce

Goupilles fendues / Goupilles en R

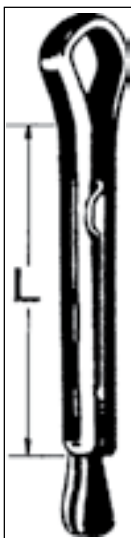

WEDGE-FAST COTTERS

LOW CARBON STEEL
Plain Finish

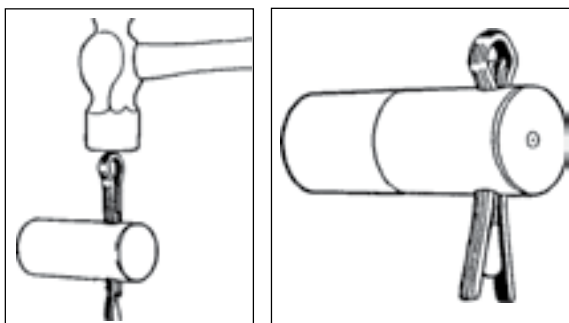

Length of Cotter pin is measured from under the head to the end of legs.


Use WEDGE-FAST COTTERS

- where a positive lock is required to meet safety regulations.
- where vibration may cause wear over a period of time.
- where continued hard use can be expected as on heavy industrial machinery, farm implements, off-the-road construction equipment, mining equipment, railroad rolling stock, etc.
- where equipment may be exposed to vandalism.

SPAENAUR No.	SIZE DIA. x LENGTH	HOLE SIZE	RECOMMENDED SHAFT DIAMETER		PKG QTY.
			MIN.	MAX.	
091-001	5/16" x 2"	3/8"	3/4"	1"	100
091-002	5/16" x 2-1/2"	3/8"	1"	1-1/4"	100
091-003	5/16" x 3"	3/8"	1-5/16"	1-1/2"	100
091-004	5/16" x 3-1/2"	3/8"	1-5/16"	1-1/2"	100
091-005	3/8" x 2-1/2"	7/16"	1"	1-1/4"	100
091-006	3/8" x 3"	7/16"	1-5/16"	1-1/2"	100
091-007	3/8" x 3-1/2"	7/16"	1-5/16"	1-1/2"	100

Right-angle Grip HITCH PIN CLIP

SPAENAUR No. 090-103

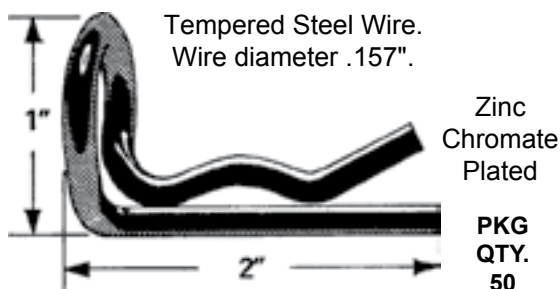

Tempered Steel Wire.
Wire diameter .157".


Zinc Chromate Plated

PKG QTY. 50

Used in construction work for securing concrete forms. Also many other applications.

CLINCH PINS

For agricultural implements and heavy equipment. A quick hitch for tow bar and other applications.

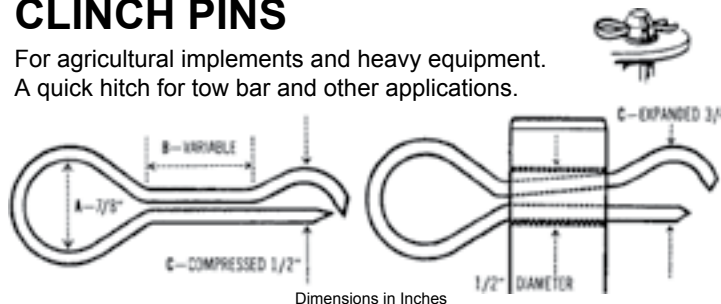

SPAENAUR No.	Metal	Wire Dia.	B Shank Length	Length O.A.	For Hole Dia.	PKG QTY.
090-102	Steel	5/16	1-1/4	3-7/16	3/8 to 7/16	10
CP-101	Steel, Zinc Plated	3/8	1-1/4	3-1/2	1/2 to 5/8	10
CP-99	Steel, Zinc Plated	3/8	1-1/2	3-1/2	1/2 to 5/8	10
092-001	Brass	5/32	9/16	1-1/8	3/16 to 5/16	100

CATALOG 14 SPAENAUR