

Inch and Metric
Pouce et Métrique




Nippers / Snips
Pincettes coupantes / Cisailles

Carpenters' Pincers

- especially favoured by craftsmen for precision workmanship, extreme wear resistance and good balance

- heavy duty
- Material: special tool steel, oil-hardened

SPAENAUR No.	Mfg. No.	O/A Length		Head	Handles	Wt. g
		mm	inch			
876-1274	5000130	130	5-1/4"	polished	black atramentized	120
876-1275	5000160	160	6-1/4"			220



876-1274

Concretors' Nippers

(Tower Pincers/Steel Fixers Nippers)

- for concrete reinforcing wire
- to twist and cut binding wire in one operation
- precision and long life make these the most widely purchased tool of their kind in the world
- Material: special tool steel, oil-hardened



876-1259

SPAENAUR No.	Mfg. No.	O/A Length		Head	Handles	Wt. g
		mm	inch			
876-1253	9900200	200	8"	polished	black atramentized	220
876-1255	9900250	250	10"			400
876-1259	9901220	220	8-1/2"	polished	plastic-coated	350
876-1262	9901300	300	12"			510

High Leverage Concretors' Nippers

- for safe working to protect the wrist
- optimum cutting capacity with low force due to high leverage
- cutting capacity: soft wire up to max. 4.5 mm (3/16") in diameter
- high damping after cutting - easy on tendons and muscles
- Material: special tool steel, oil-hardened




876-1506

SPAENAUR No.	Mfg. No.	O/A Length		Head width		Head	Handles	Wt. g
		mm	inch	mm	inch			
876-1506	9910300	300	12"	25	1"	polished	black atramentized	465

Electronics End Cutting Nippers

- box joint
- with captive, frictionless double spring
- cutting edge hardness approx. 56 HRC
- Style 0: bevelled, for cutting soft and medium-hard wires
- Style 1: non-bevelled, for cutting copper wire and diode leads flush with surface
- Material: special tool steel, oil-hardened



Finishes

1. Polished Head, Soft Plastic-Coated Handles.



Style 0

876-1406

SPAENAUR No.	Mfg. No.	O/A Length		Style	Finishes	Cutting Ø Capacity						Wt. g
		mm	inch			Soft Wire		Med-Hd Wire		Hard Wire		
						mm	inch	mm	inch	mm	inch	
876-1406	6401115	115	4-1/2"	0	1	0.3-1.6	1/64"-1/16"	1.0	3/64"	0.5	1/64"	55
876-1407	6411115	115	4-1/2"	1	1	0.3-1.4	1/64"-3/64"	0.8	1/32"	-	-	55

All items on this page
PKG QTY. 1



Nippers / Snips


Pinces coupantes / Cisailles



Inch and Metric
Pouce et Métrique

High Leverage End Cutting Nippers

- for piano wire, and soft wire
- cutting edges separately induction-hardened
- cutting edge hardness approx. 64 HRc
- Material: Chrome Vanadium electric steel, oil-hardened

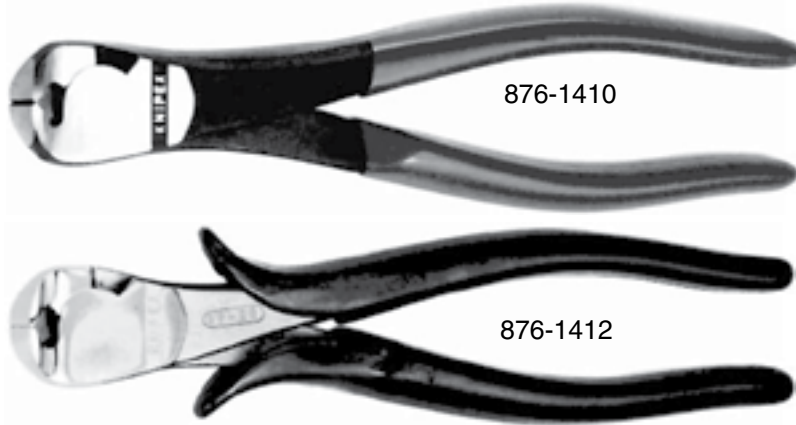

SPAENAUR No.	Mfg. No.	O/A Length		Head	Handles	Cutting Ø Capacity								
		mm	inch			Soft Wire		Med-Hd Wire		Hard Wire		Piano Wire		Wt. g
876-1408	6701140	140	5-1/2"	polished	plastic-coated	4.0	5/32"	3.1	1/8"	2.0	5/64"	1.5	1/16"	
876-1409	6701160	160	6-1/4"			4.0	5/32"	3.4	9/64"	2.5	3/32"	2.0	5/64"	240
876-1410	6701200	200	8"			4.0	5/32"	4.2	11/64"	3.0	1/8"	2.5	3/32"	325
876-1412	6705160	160	6-1/4"	chrome plated	heavily insulated	4.0	5/32"	3.1	1/8"	2.5	3/32"	2.0	5/64"	260

End Cutting Nippers


- for hard and soft wire
- cutting edges separately induction-hardened
- cutting edge hardness approx. 60 HRc
- ideal for cutting soft and annealed tie wire
- Material: special quality high grade tool steel, oil-hardened



SPAENAUR No.	Mfg. No.	O/A Length		Head	Handles	Cutting Ø Capacity						
		mm	inch			Soft Wire		Med-Hd Wire		Hard Wire		Wt. g
876-1270	6801160	160	6-1/4"	polished	plastic-coated	4.0	5/32"	2.8	7/64"	2.3	3/32"	

Mechanics End Cutting Nippers

- for piano wire, and thin copper wire
- cutting edges separately induction-hardened
- cutting edge hardness approx. 63 HRc
- Material: Chrome Vanadium electric steel, oil-hardened



SPAENAUR No.	Mfg. No.	O/A Length		Head	Handles	Cutting Ø Capacity								
		mm	inch			Soft Wire		Med-Hd Wire		Hard Wire		Piano Wire		Wt. g
876-1413	6903130	130	5-1/4"	chr. plated	plastic-coated	2.0	5/64"	1.3	3/64"	1.0	3/64"	0.75	1/32"	

All items on this page PKG QTY. 1

P

P130

© 2018 Spenaaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spenaaur Inc. Subject to Catalog Terms and Conditions of Use available at Spenaaur.com and on page TC2 and TC3 at the back of this catalog.
© 2018 Spenaaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spenaaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spenaaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

CATALOG 14

SPAENAUR


Inch and Metric
Pouce et Métrique



Nippers
Pincés coupantes

Diagonal Cutting Nippers

- for soft and hard wires
- induction-hardened precision cutting edges
- cutting edge hardness approx. 62 HRc

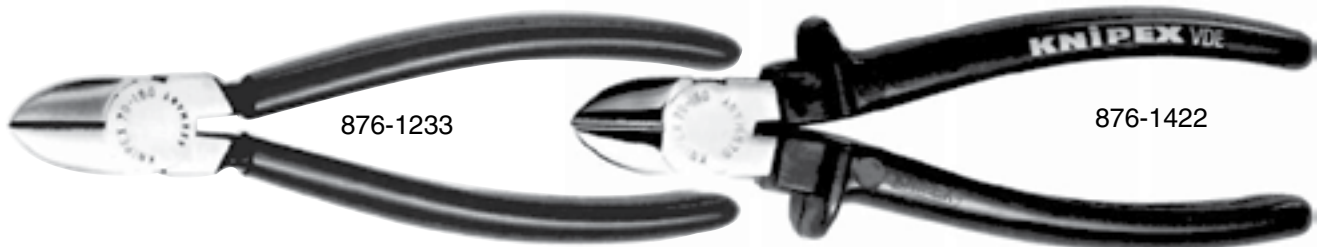


SPAENAUR No.	Mfg. No.	O/A Length		Head	Handles	Cutting Ø Capacity						Wt. g
		mm	inch			Soft Wire		Med-Hd Wire		Hard Wire		
876-1232	7001125	125	4-7/8"	polished	plastic-coated	3.0	1/8"	2.3	3/32"	1.5	1/16"	90
876-1233	7001160	160	6-1/4"			4.0	5/32"	2.8	7/64"	2.0	5/64"	170
876-1234	7001180	180	7"			4.0	5/32"	3.0	1/8"	2.5	3/32"	200
876-1422	7006140	140	5-1/2"	chrome plated	heavily insulated VDE-tested 1000 V	4.0	5/32"	2.5	3/32"	1.8	5/64"	135
876-1424	7006180	180	7"			4.0	5/32"	3.0	1/8"	2.5	3/32"	240

Electronic Diagonal Cutting Nippers

(heavy pattern)



- box joint
- captive, frictionless double spring
- cutting edges separately induction-hardened
- cutting edge hardness approx. 60 HRc
- Style 1: additional with automatic holding device, no uncontrolled jump offs - no disturbance in circuits
- Material: special tool steel, oil-hardened



Finishes

1. Polished Head, Soft Plastic Coated Handles

SPAENAUR No.	Mfg. No.	O/A Length		Style	Fin.	Dimensions						Cutting Ø Capacity		Wt. g		
		mm	inch			L3		W		T1		Soft Wire	Hard Wire			
876-1367	7701115	115	4-1/2"	0	1	14	9/16"	11	7/16"	7.5	19/64"	1.6	1/16"	0.5	1/64"	70

All items on this page
PKG QTY. 1

CATALOG 14

SPAENAUR

Nippers / Snips / Cutting Tools



Pinces coupantes / Cisailles / Outils coupants



Inch and Metric
Pouce et Métrique

High Leverage Diagonal Cutting Nippers



- with fixed, forged-on articulated axle for heaviest duty
- suitable for piano wire and equally for soft wire
- induction-hardened precision cutting edges
- cutting edge hardness approx. 64 HRc
- little effort is required thanks to the proper coordination of cutting edge angle, leverage ratio and handle shape
- the 250 mm long Diagonal Cutting Nippers are suitable for Cu-cable up to 16 mm² and Alu-cables up to 35 mm²
- High Leverage Centre Cutters 876-1225 cut hard or thick wires with less effort than equally long Diagonal Cutting Nippers
- Material: Chrome Vanadium electric steel, oil-hardened

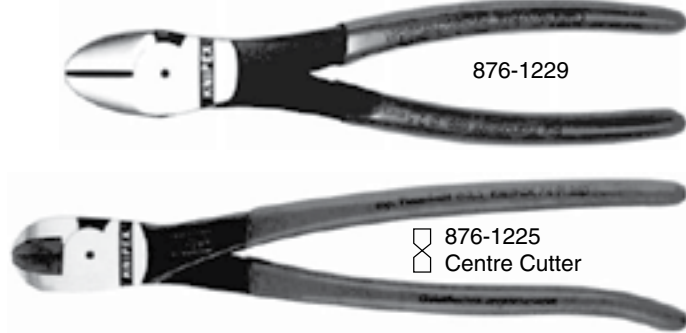

SPAENAUR No.	Mfg. No.	O/A Length		Head	Handles	Soft Wire		Cutting Ø		Capacity		Piano Wire		Wt. g
		mm	inch			mm	inch	Med-Hd Wire mm	inch	Hard Wire mm	inch	mm	inch	
876-1226	7401140	140	5-1/2"	polished	plastic-coated	4.0	5/32"	3.1	1/8"	2.0	5/64"	1.5	1/16"	130
876-1227	7401160	160	6-1/4"					3.4	9/64"	2.5	3/32"	2.0	5/64"	170
876-1228	7401180	180	7"					3.8	5/32"	2.7	7/64"	2.2	5/64"	220
876-1229	7401200	200	8"					4.2	11/64"	3.0	1/8"	2.5	3/32"	260
876-1230	7401250	250	10"					4.6	3/16"	3.5	9/64"	3.0	1/8"	380
876-1379	7406160	160	6-1/4"	chrome plated	heavily insulated VDE-tested	4.0	5/32"	3.4	9/64"	2.5	3/32"	2.0	5/64"	200
876-1225	7491250	250	10"	polished	plastic-coated	5.0	13/64"	5.0	13/64"	3.8	5/32"	3.5	9/64"	390

Electronic Super Knips

- for soft wire - non-bevelled cutting edges, precision ground, for flush cutting
- cutting edges hardness approx. 56 HRc
- precise styled tips also cut tying wires from 0.2 mm dia.
- zero-play joint with high-grade steel rivet
- extremely easy action, fatigue-proof working
- with opening limit
- Material: INOX - stainless steel

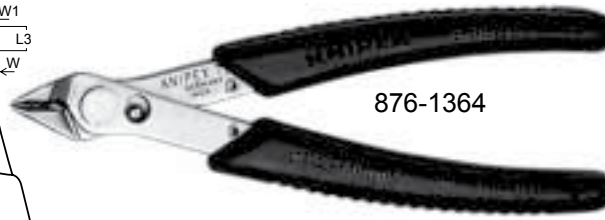

Finishes
1. Polished Head, Soft Plastic Coated handles

SPAENAUR No.	Mfg. No.	O/A Length		Style	Fin.	Dimensions						Cutting Ø Capacity				Wt. g		
		mm	inch			L3 mm	inch	W mm	inch	T1 mm	inch	W1 mm	inch	Soft Wire mm	inch		Med-hd Wire mm	inch
876-1364	7803125	125	4-7/8"	0	1	9.0	11/32"	13.5	11/16"	7.5	19/64"	—	—	1.6	1/16"	1.0	3/64"	50

Compact Wire and Bolt Cutters

- for piano wire or for soft solid wire, bolts, nails, rivets and screws.
- induction-hardened precision cutting edges
- cutting edge hardness approx. 64 HRc
- exceptional cutting performance with little physical effort through lever action
- ergonomically styled handles
- Material: Chrome Vanadium electric steel, oil-hardened



Finishes
1. Atramentized Head, Plastic Coated Handles

SPAENAUR No.	Mfg. No.	O/A Length		Fin.	Soft Wire		Cutting Ø		Capacity		Piano Wire		Wt. g
		mm	inch		mm	inch	mm	inch	mm	inch			
876-1231	7101200	200	8"	1	6.0	15/64"	5.2	13/64"	4.0	5/32"	3.6	9/64"	340

All items on this page
PKG QTY. 1

CATALOG 14

SPAENAUR

Nippers


Pinces coupantes



Inch and Metric
Pouce et Métrique

End Cutting Nipper

■ with box joint, no play - reduces wear





SPAENAUR No. (Mfg. No.)	Approx. Lgth. mm inch	Style	Dimensions				Cutting Capacity Maximum		Wt. g
			L3 mm inch	W mm inch	T1 mm inch	T2 mm inch	*Soft mm inch	*Hard Ø mm/in.	
876-1288 (6412)	115 4-1/2"	without bevel, for mirror cutting soft wire types	6.0 0.24"	11.0 0.43"	7.0 0.28"	16.0 0.63"	2.0 0.079"	0.5 0.020"	80

■ captive, frictionless double spring to produce gentle and even operation

■ cutting edge hardness approx. 56HRc

■ Material: special tool steel, oil-hardened

■ Head polished, heavy duty plastic coated handles

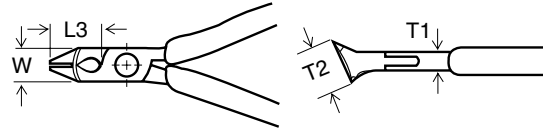

876-1290 (6432)	120 4-3/4"	flush	10.0 0.39"	11.0 0.43"	7.0 0.28"	17.0 0.67"	1.5 0.059"	0.5 0.020"	80
876-1291 (6452)	115 4-1/2"	short head, full flush	10.0 0.39"	10.5 0.41"	7.0 0.28"	12.0 0.47"	1.3 0.051"	—	60
876-1292 (6462)	120 4-3/4"	micro, flush	18.5 0.73"	9.5 0.37"	6.0 0.24"	5.0 0.20"	0.6 0.024"	—	60

Diagonal Cutting Nippers

■ box joint



■ cutting edges separately induction-hardened

■ captive, low friction double spring for gentle, smooth closing and opening

■ cutting edge hardness approx 60 HRc

■ Material: special tool steel, oil-hardened

■ head polished, plastic coated handles

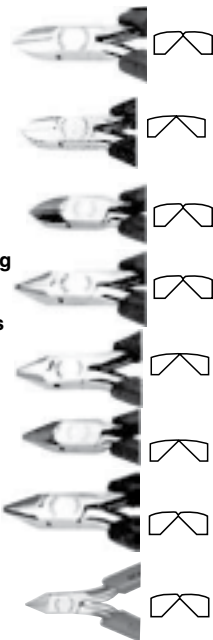

876-1293 7702	115 4-1/2"	round, flush	14.0 0.55"	11.0 0.43"	7.5 0.30"	—	1.6 0.062"	0.5 0.020"	70
876-1294 7722	115 4-1/2"	with a small or no bevel for mirror	14.0 0.55"	11.0 0.43"	7.5 0.30"	—	1.3 0.051"	—	70
876-1295 7722	130 5"	with a small or no bevel for mirror	18.0 0.71"	14.0 0.55"	9.5 0.37"	—	2.0 0.079"	—	110
876-1296 7732	115 4-1/2"	pointed head with small or normal bevel	14.0 0.55"	11.0 0.43"	7.0 0.28"	—	1.3 0.051"	0.5 0.020"	70
876-1297 7742	115 4-1/2"	pointed head without bevel	14.0 0.55"	11.0 0.43"	7.0 0.28"	—	1.3 0.051"	—	75
876-1299 7742	130 5"	pointed head without bevel	18.0 0.71"	14.0 0.55"	9.5 0.37"	—	1.6 0.062"	—	115
876-1300 7752	115 4-1/2"	flat ground, flush	11.5 0.45"	14.0 0.55"	7.0 0.28"	—	1.0 0.039"	0.5 0.020"	70
876-1302 7772	115 4-1/2"	pointed mini head, with small bevel	10.5 0.41"	9.5 0.37"	6.0 0.24"	—	1.0 0.039"	—	55

Safety advice:

Always wear goggles when using cutting pliers.

* Wire: soft, tensile strength approx.: **22 kp/mm², 220N/mm²**; material example: copper, plastic o.e.
* Wire: hard, tensile strength approx.: **180 kp/mm², 1800N/mm²**; material example: rope wire and spring wire.

All items on this page PKG QTY. 1