

Inch  
Pouce

# QUICKEDGE®


Trim  
Garnitures

Quickedge® Trims' rugged, vinyl construction assures dependable performance, long life and easy use. The patented Quickedge® segmented metal core provides the strongest and most resilient gripping power.

Quickedge® Trims are available in decorative engineered designs to enhance your product with a variety of plastic, chrome and coloured trims.

Hundreds of consumer and industrial product applications.

Quickedge® Trims are available in both aluminum and steel core.

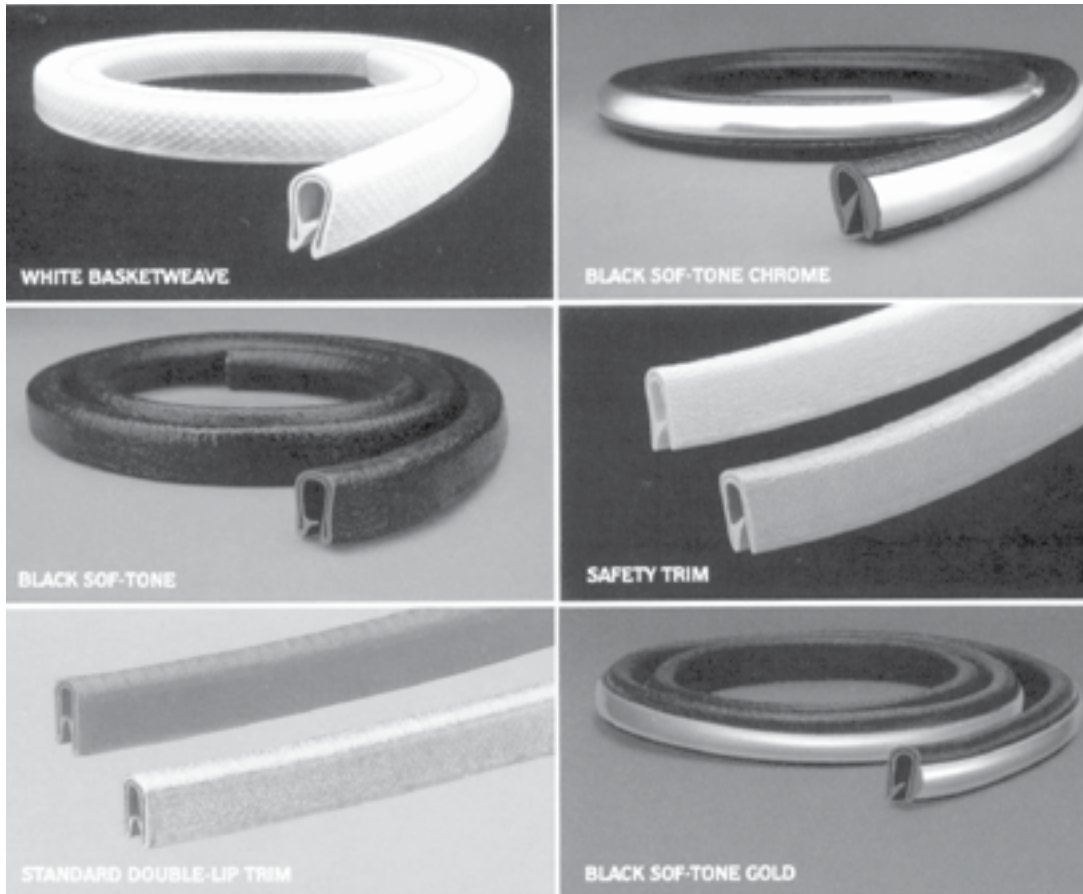

**Spaenaur is an Authorized Distributor of QUICKEDGE® Trim.**  
Please contact the Spaenaur sales desk at 1-800-265-8772 for more information.



PHYSICAL CHARACTERISTICS: Vinyl (PVC) embossed extrusion with segmented metal core .018" thick cold rolled steel, no. 2 temper. All parts are 65 durometer except Standard Double Lip Trims which are 80 durometer hardness (Shore A 15 second delay.)

Tensile strength: 2200 P.S.I./min. Elongation: 300%/min. Cold Impact: Will withstand 1-1/2 foot-pound impact at -29°C. Heat resistance: 66°C max. for continuous use. Flammability: Self extinguishing, passes Federal Spec. FSS-302.



## STANDARD DOUBLE LIP TRIM

for 1/32" to 1/8" Edges.  
Grips Edges from .032" to .125" Thick.

		PKG QTY.		PKG QTY.
<b>825-002</b>	Black-Sof-Tone	100 ft.	<b>825-003</b>	Blue Sof-Tone
<b>RW-84</b>	Grey Sof-Tone	100 ft.	<b>825-004</b>	Brown Sof-Tone
<b>RW-93</b>	Fawn Sof-Tone	100 ft.	<b>RW-83</b>	Black Sof-Tone
<b>RW-94</b>	Off-White Sof-Tone	100 ft.	<b>825-005</b>	Black Basketweave
<b>RW-81</b>	Red Sof-Tone	100 ft.		

CATALOG 14 SPAENAUR