



POLYURETHANE TUBING

Colour:
Natural, Clear

**Polyether-Based
"Durometer 85 Shore A"**

Polyether-based polyurethane tubing offers excellent resistance to kinking, abrasion, hydrolysis, oxidation, and ozone. Polyether-based polyurethane tubing offers high resiliance, good energy-absorption, good all around chemical resistance.

Excellent in applications requiring superior toughness and resistance to tear, abrasion, ozone, oxidation, fungus, and humidity. Excels in cold temperature, impact and flexibility.

SPAENAUR No.	INSIDE DIA.	OUTSIDE DIA.	WALL THICK.	UNIT PKG. 1 REEL
825-200	1/16"	1/8"	1/32"	2,500 ft.
825-201	3/32"	5/32"	1/32"	2,500 ft.
825-202	1/8"	3/16"	1/32"	2,000 ft.
825-203	1/8"	1/4"	1/16"	1,000 ft.
825-204	3/16"	1/4"	1/32"	1,000 ft.
825-205	3/16"	5/16"	1/16"	500 ft.
825-206	1/4"	5/16"	1/32"	100 ft.
825-207	1/4"	3/8"	1/16"	100 ft.
825-235	3/8"	1/2"	1/16"	50 ft.
825-218	Same as above except Black Polyethylene, 55 Duro.			250 ft.

G

FLEXIBLE VINYL (PVC) TUBING

"Durometer 68 Shore A"
Colour: Natural, Clear.

Natural Vinyl Tubing is plasticized from non-toxic flexible PVC. This tubing offers a wide range of chemical resistance which makes problems involving the handling of corrosive, pure or sensitive solutions. This tubing will not offer the kink resistance or strength of our polyurethane tubing, but is an excellent alternative choice when cost is an over riding priority.

SPAENAUR No.	INSIDE DIA.	OUTSIDE DIA.	WALL THICK.	UNIT PKG. 1 REEL
825-208	1/16"	1/8"	1/32"	4,000 ft.
825-209	1/16"	1/4"	3/32"	1,000 ft.
825-210	3/32"	5/32"	1/32"	2,500 ft.
825-211	1/8"	3/16"	1/32"	500 ft.
825-212	1/8"	1/4"	1/16"	1,000 ft.
825-213	3/16"	1/4"	1/32"	1,000 ft.
825-214	3/16"	5/16"	1/16"	500 ft.
825-215	1/4"	3/8"	1/16"	500 ft.
825-216	1/4"	7/16"	3/32"	500 ft.



Inch and Metric

Additional Plastic Tubing - Available but not stocked.

Polyurethane Tubing, Polyester-Based "Durometer 95 Shore "A"
Coiled Polyurethane Tubing, Polyether-Based, Flexible Vinyl Tubing "Durometer 90 Shore "A", Polyurethane Tubing, Polyether-Based, "Durometer 90 Shore "A", Polyethylene Tubing, Natural, "Durometer 55 Shore "D", Vyplas Tubing "Durometer 80 Shore "A"
Polyethylene Tubing, Black, "Durometer 55 Shore "D" **UV RESISTANT FOR OUTDOOR USE**
Many of the above listed tubings can be supplied in various colours.

Flexible Line Clamps of Yellow Plastic

(easily seen on the project)

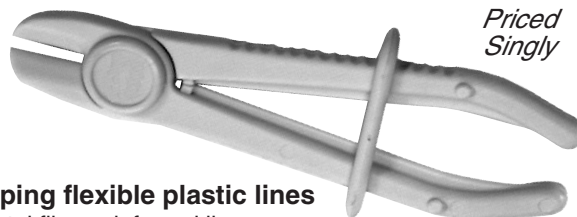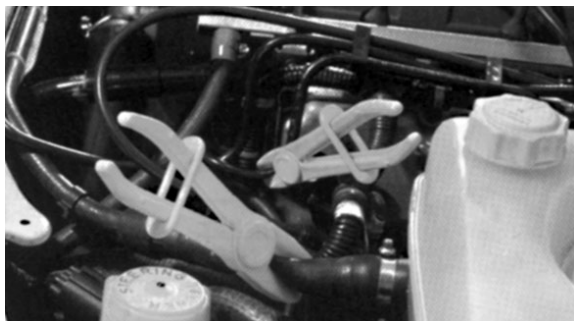

Priced Singly

For clamping flexible plastic lines
(except metal fibre reinforced lines e.g. fuel injection and brake lines).

SPAENAUR No.	Clamps line dia. up to:	Overall Length
993-980	37/64" (15 mm)	6" (150 mm)
993-981	1-5/32" (30 mm)	7-1/4" (180 mm)

CATALOG 13

Miniature Nylon Fittings for use with tubing shown above are on the following pages.

Tel: 1-800-265-8772 Fax: 519-744-0818

G15