

Inch

Trim Seals

Pouce

Garnitures d'étanchéité

PUSH-ON TRIM SEALS TO WEATHERSTRIP AND DECORATE VEHICLE DOORS


Push-on trim seals offer a fast, easy way to weatherstrip and trim vehicle doors and windows. They install by simply pushing them over raw edges or flanges.

VINYL AND SPONGE RUBBER PARTS


"ST" Sections

"ST" Section parts are made of EPDM sponge seal which is attached to a black leather-grain vinyl trim with a segmented steel core. These flexible parts push on a metal flange to trim the interior and seal the opening.

They grip edges from .060" to .140" thick.

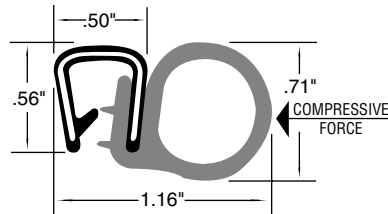


825-B18-1K
Bulb Seal

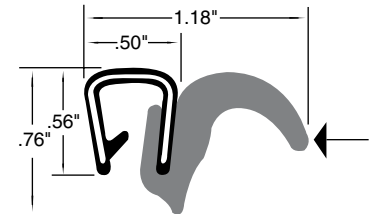


825-301
Lip Seal

PKG QTY. 25 FT.

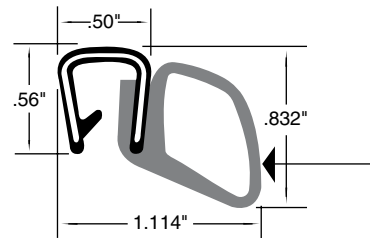


825-302
Half Bulb Seal

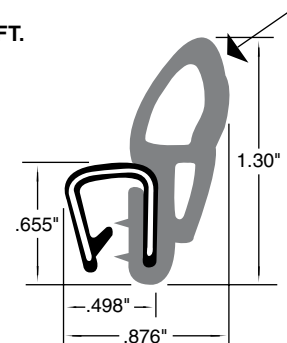


825-303
Vertical Wedge

DUAL DUROMETER SPONGE AND SOLID RUBBER PARTS

"BZ" Sections are dual durometer EPDM flexible rubber extrusions. The sponge bulb seals the opening, and the durable solid rubber base, with a flexible wire core, provides high strength gripping power.

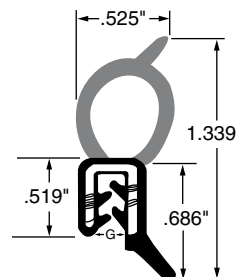

SPAENAUR (G)
No. Grip Range
825-085 .060"-.079"

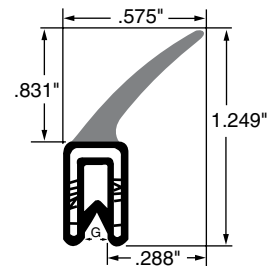

SPAENAUR (G)
No. Grip Range
825-B04-1N .079"-.099"

PKG QTY. 82 FT.

Trim Seals / Rubber Channel Tools

Inch

Garnitures de garniture / outils en caoutchouc


Pouce

PUSH-ON TRIM SEALS


DUAL DUROMETER SPONGE AND SOLID RUBBER PARTS

"RS" Sections

"RS" Sections are dual durometer flexible rubber extrusions. The sponge rubber EPDM bulb seals the opening. The durable solid rubber EPDM base has a flexible wire carrier that provides high strength gripping power.



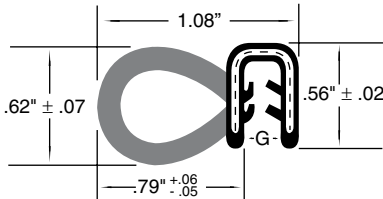


PKG QTY. 25 FT.

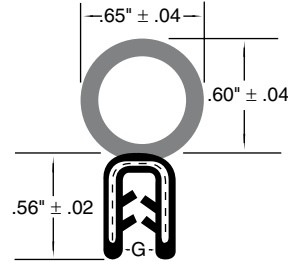

SPAENAUR No.	(G) Grip Range
825-093	.040"-.070"
825-B45-1W	.040"-.070"
825-068	.065"-.095"
825-069	.090"-.120"

SPAENAUR No.	(G) Grip Range
825-B08-1P	.040"-.070"
825-065	.065"-.095"
825-066	.090"-.120"

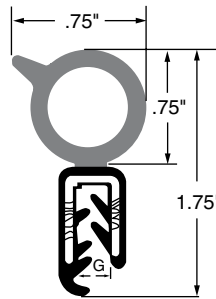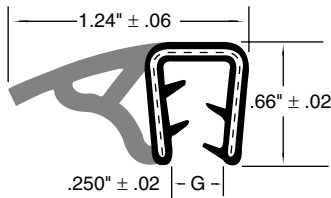


SPAENAUR No.	(G) Grip Range
825-017	.250"±.02

SPAENAUR No.	(G) Grip Range
825-087	.110"-.130"

SPAENAUR No.	(G) Grip Range
825-088	.110"-.130"

E-Z Lock Tools

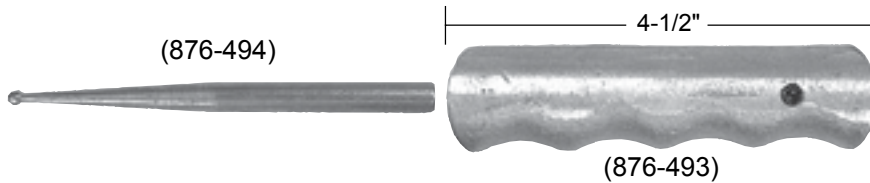

PKG QTY. 1

FOR INTEGRAL LOCK, ONE PIECE SELF-SEALING WEATHERSTRIPS



- Spaenaur No.**
- 876-493** Aluminum Handle
 - 876-494** Straight Bit
 - 876-591** Cornering Bit (Right Hand)

Please Note: Above items are NOT sold as a unit, but must be ordered separately.



Spaenaur No. 876-496

Nylon Spatula for glass insertion into rubber channel, tucking in cut ends, etc.

8" Overall Length.

TOOL PULLS THE LOCKING STRIP INTO THE RETAINER CHANNEL

For Weatherstrip and Moulding Clip Tool please refer to pages K20-K21

K10

Inch
Pouce

QUICKEDGE®


Trim
Garnitures

Quickedge® Trims' rugged, vinyl construction assures dependable performance, long life and easy use. The patented Quickedge® segmented metal core provides the strongest and most resilient gripping power.

Quickedge® Trims are available in decorative engineered designs to enhance your product with a variety of plastic, chrome and coloured trims.

Hundreds of consumer and industrial product applications.

Quickedge® Trims are available in both aluminum and steel core.

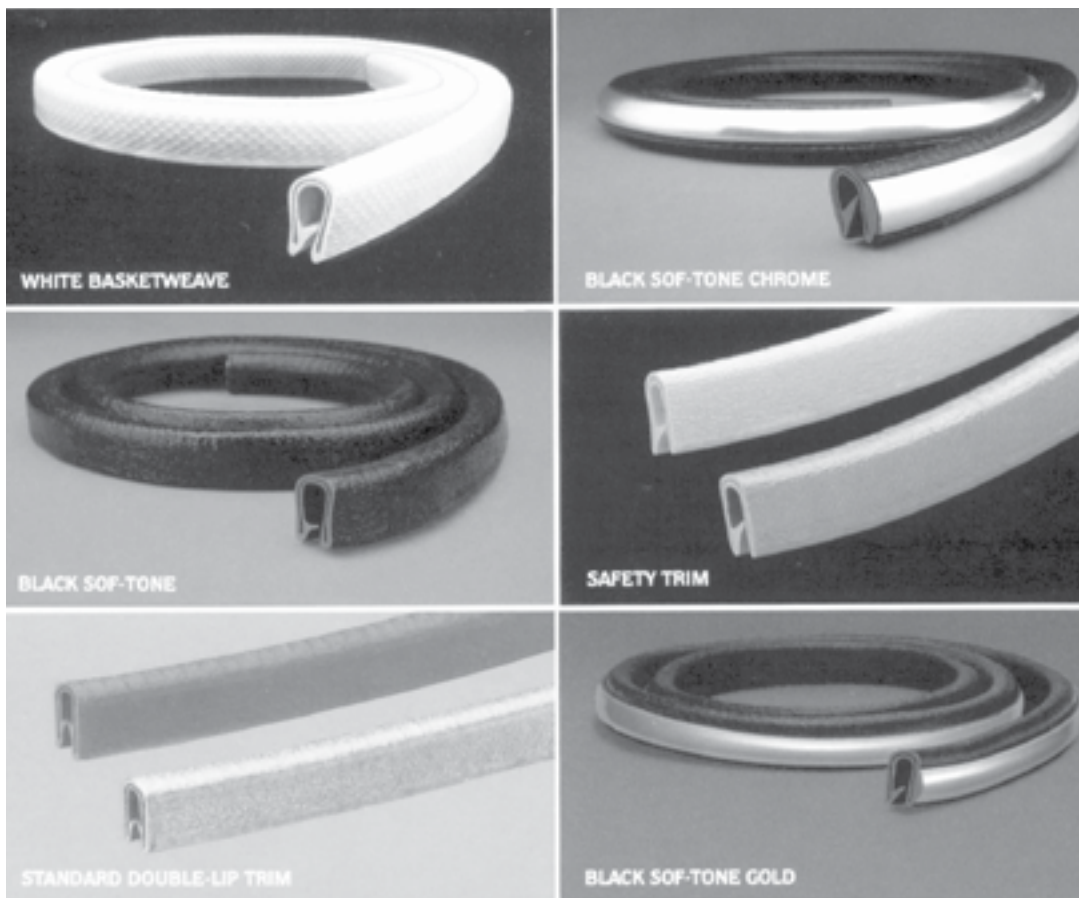

Spaenaur is an Authorized Distributor of QUICKEDGE® Trim.
Please contact the Spaenaur sales desk at 1-800-265-8772 for more information.



PHYSICAL CHARACTERISTICS: Vinyl (PVC) embossed extrusion with segmented metal core .018" thick cold rolled steel, no. 2 temper. All parts are 65 durometer except Standard Double Lip Trims which are 80 durometer hardness (Shore A 15 second delay.)

Tensile strength: 2200 P.S.I./min. Elongation: 300%/min. Cold Impact: Will withstand 1-1/2 foot-pound impact at -29°C. Heat resistance: 66°C max. for continuous use. Flammability: Self extinguishing, passes Federal Spec. FSS-302.



STANDARD DOUBLE LIP TRIM

for 1/32" to 1/8" Edges.
Grips Edges from .032" to .125" Thick.

		PKG QTY.		PKG QTY.
825-002	Black-Sof-Tone	100 ft.	825-003	Blue Sof-Tone
RW-84	Grey Sof-Tone	100 ft.	825-004	Brown Sof-Tone
RW-93	Fawn Sof-Tone	100 ft.	RW-83	Black Sof-Tone
RW-94	Off-White Sof-Tone	100 ft.	825-005	Black Basketweave
RW-81	Red Sof-Tone	100 ft.		

CATALOG 14 SPAENAUR